

09.25.00

IN THE UNITED STATES
PATENT AND TRADEMARK OFFICE

PATENT APPLICATION

David Alan Ackerman
Sung-Nee George Chu
Eric J Dean
John Evan Johnson
Liming Zhang

CASE 27-15-1-13-2

TITLE Aging In Tunable Semiconductor Lasers

ASSISTANT COMMISSIONER FOR PATENTS
WASHINGTON, D.C. 20231

"Express Mail" mailing label

number: **EK404986766US**

Date of Deposit **9/22/00**

I hereby certify that this application
being deposited with the United States Patent
Service "Express Mail Post Office
Addressee" service under 37 CFR 1.110 on the
date indicated above and is addressed to the
Commissioner of Patents and Trademarks
Washington, D.C. 20231.

W. F. J. Thomas
(Printed name of person mailing paper or fee)

W. F. J. Thomas
(Signature of person mailing paper or fee)

SIR:

NEW APPLICATION UNDER 37 CFR § 1.53(b)

Enclosed are the following papers relating to the above-named application for patent:

Specification
17 Informal Sheets of drawing(s)
1 Assignment(s) with Cover Sheet
Declaration and Power of Attorney
Information Disclosure Statement

CLAIMS AS FILED				
	NO. FILED	NO. EXTRA	RATE	CALCULATIONS
Total Claims	28 - 20 =	8	x \$18 =	\$144
Independent Claims	4 - 3 =	1	x \$78 =	\$78
Multiple Dependent Claims, if applicable			+ \$260 =	\$0
Basic Fee				\$690
			TOTAL FEE	\$912

Please file the application and charge **Lucent Technologies Deposit Account No. 12-2325** the amount of \$912, to cover the filing fee. Duplicate copies of this letter are enclosed. In the event of non-payment or improper payment of a required fee, the Commissioner is authorized to charge or to credit **Deposit Account No. 12-2325** as required to correct the error.

The Assistant Commissioner for Patents is hereby authorized to treat any concurrent or future reply, requiring a petition for extension of time under 37 CFR § 1.136 for its timely submission, as incorporating a petition for extension of time for the appropriate length of time if not submitted with the reply.

Please address all correspondence to **Docket Administrator (Room 3C-512), Lucent Technologies Inc., 600 Mountain Avenue, P.O. Box 636, Murray Hill, New Jersey 07974-0636**. However, telephone calls should be made to me at 908-582-6866.

Respectfully,

John F. McCabe

John F. McCabe

Reg. No. 42,854

Attorney for Applicant(s)

Date: 9/22/2000

Lucent Technologies Inc.
600 Mountain Avenue (Room 3C-512)
P.O. Box 636
Murray Hill, New Jersey 07974-0636

AGING IN TUNABLE SEMICONDUCTOR LASERS

BACKGROUND OF THE INVENTION

Field of the Invention

This invention relates generally to lasers and, more particularly, to aging of tunable semiconductor lasers.

Discussion of the Related Art

Recent work has concentrated on producing laser transmitters for use in dense wavelength division multiplexed (DWDM) optical networks. In a DWDM network, data signals are transmitted in a set of adjacent and spectrally narrow bands. Each band functions as a separate communications channel. For such a channel structure, a transmitter must produce a spectrally narrow output that injects optical energy into a single band. Distributed Bragg reflector (DBR) lasers are strong candidates as transmitters for DWDM networks, because DBR lasers have spectrally narrow outputs.

A tunable DBR laser has an output wavelength that depends on the value of a tuning current. The dependence may be shown by an operating characteristic. Figure 1 shows an initial operating characteristic 10 for one DBR laser. The operating characteristic 10 has a series of steps 11-20. A DBR laser operates in a single mode by staying on one of the steps when functioning as a DWDM transmitter. The output wavelength remains fairly constant while the laser remains on one step. Use physically changes the DBR laser, and the physical changes alter the locations of the steps 11-20 to produce new operating characteristic 22. On the new characteristic 22, an initial value of the tuning current may produce a new output wavelength. Thus, aging can induce drift of the laser's output wavelength..

Age-induced wavelength drift has serious consequences for DBR lasers that operate as transmitters in DWDM networks. Wavelength drift can cause the laser to hop to a new mode on an operating characteristic. The new mode may have a wavelength that corresponds to a different channel of the DWDM network. Mode hopping can be avoided through closed-loop wavelength feedback, which adjusts the value of the tuning current in response to detecting the onset of a mode hop. Additional closed-loop

wavelength feedback can also keep side-band emission levels low, by maintaining operation of the DBR laser near a center of a step. Nevertheless, closed-loop wavelength feedback cannot compensate for changes in the values of tuning currents of other modes, i.e., steps at which the DBR laser is not presently operating. Changes to the value of tuning currents for those modes result in uncertainties on how to change the tuning current to move to a new step on the operating characteristic, e.g., to change the transmission channel in a DWDM network.

BRIEF SUMMARY OF THE INVENTION

In one embodiment, the invention features a process for evaluating an aging property of a distributed Bragg reflector (DBR) laser. The process includes illuminating a Bragg grating of the distributed Bragg reflector (DBR) laser with light while the DBR laser is both supplied a tuning current and not lasing. The process also includes performing an action to the DBR laser responsive to a wavelength of a Bragg peak in a portion of the light reflected by the Bragg grating and a value of the tuning current supplied during the illuminating.

In another embodiment, the invention features a process for operating a wavelength-tunable DBR laser. The process includes operating the DBR laser at a first output wavelength, measuring a value of a tuning current causing the DBR laser to operate at the first output wavelength, and calculating a new value of the tuning current. The act of calculating is based in part on the measured value of the tuning current. The new value is capable of operating the DBR laser at a second output wavelength.

In another embodiment, the invention features an apparatus including a wavelength-tunable DBR laser and a controller coupled to apply a tuning current to an electrical terminal of the DBR laser. The controller is capable of applying a new value of the tuning current to the terminal to cause the DBR laser to jump to a new operating mode and is configured to determine the new value based in part on a measured pre-jump value of the tuning current.

In another embodiment, the invention features a system capable of determining age-induced changes to an output wavelength of a DBR laser. The system includes the DBR laser, a spectrum analyzer positioned to receive light reflected by a tunable Bragg

grating of the laser, and a processor coupled to receive data on a reflection spectra of the Bragg grating from the spectrum analyzer. The processor also receives data values of tuning currents associated with the reflection spectra and is configured to determine a functional relation between Bragg peak wavelengths and the values of the tuning currents from the data.

BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWING

Figure 1 shows initial and post-aging operating characteristics of a tunable DBR laser;

Figure 2 is a side view of a tunable DBR laser;

Figure 3 shows a reflection spectrum of a Bragg grating used in the tunable DBR laser of Figure 2;

Figure 4 shows the reflection spectrum of the Bragg grating of Figure 2 for various values of the tuning current;

Figure 5 shows an operating characteristic of the DBR laser at the age at which the Bragg spectra of Figure 4 were measured;

Figure 6 is a flow chart for a process that compensates for age-induced changes to the operating characteristic of the DBR laser of Figure 2;

Figure 7 shows the age-induced change to the relation between Bragg wavelength shift and tuning current for the DBR laser of Figure 2;

Figure 8A shows initial, aged, and compensated Bragg peak wavelengths of the tunable Bragg grating used in the DBR laser of Figure 2;

Figure 8B shows initial, aged, and compensated operating characteristics of the DBR laser of Figure 2;

Figure 9 shows an apparatus for measuring age-induced changes to the operating characteristic of a DBR laser;

Figure 10 shows a reflection spectrum measured by the apparatus of Figure 9;

Figure 11 is a side view of a monolithic tunable DBR laser;

Figure 12 is a process for measuring Bragg spectra of the DBR laser of Figure 11 using the apparatus of Figure 9;

Figure 13 is a process for qualifying or disqualifying a tunable DBR laser with

respect to stability against wavelength drift over a preselected lifetime;

Figure 14 shows age-induced evolution of coefficients of mono-molecular contributions to the tuning current for several DBR lasers;

Figure 15 shows an apparatus that compensates for age-induced wavelength drift in DBR laser 30 shown in Figure 2; and

Figure 16 is a flow chart for a process used by the apparatus of Figure 16 to jump to new operating modes in a manner that compensates for aging.

DETAILED DESCRIPTION OF THE INVENTION

1. Tunable DBR Lasers

Referring to Figure 2, a tunable DBR laser 30 including at least a gain section 32 and a tuning section 34 is shown. The gain section 32 houses a portion 35 of an optical waveguide 36. The portion 35 has a gain medium and forms a Fabry-Perot cavity in which lasing occurs. The laser's Fabry-Perot cavity is bounded on one side by a reflector 37, e.g., a cleaved crystal facet or a grating, and on a second side by the tuning section 34. The tuning section 34 functions as a tunable reflector for the laser's Fabry-Perot cavity. Aging alters physical properties of the tuning section 34 altering, in turn, the operating characteristics of the DBR laser 30.

The tuning section 34 includes a Bragg grating 38, which is located adjacent to another portion 40 of waveguide 36. The Bragg grating 38 functions as a distributed reflector of the laser's Fabry-Perot cavity by reflecting back a portion of the light received from the cavity. The Bragg grating 38 has a spectrally selective reflectivity that enables tuning of the output wavelength of the DBR laser 30. The spectral selectivity of the Bragg grating provides attenuation for optical side-band modes of the laser's Fabry-Perot cavity so that those modes make up only a smaller portion of the total output optical power of the DBR laser 30. For the DBR laser 30, the output power in the side-band modes can be tuned to be about 10^{-1} to 10^{-2} percent as compared to even more than 50% for non-DBR lasers whose Fabry-Perot cavities have the same dimensions and gain media.

Referring to Figures 3 and 2, the reflection spectrum 42 of Bragg grating 38 is shown prior to aging. The reflection spectrum 42 has a strong wavelength-selectivity that

is indicated by reflectivity variations between central peak 44 and smaller side peaks 45-50. The wavelength, λ_m , of the central peak is referred to as the Bragg peak wavelength and is equal to $2L\mu_e(\lambda_m)/m$, i.e., the Bragg peak wavelength is $2L/m$ inside tuning section 34. Here, L is the period of the Bragg grating 38, $\mu_e(\lambda_m)$ is an effective index of refraction in portion 40 of waveguide 36, and m is the grating order, i.e., m is a positive integer. The Bragg grating 38 is a first-order, i.e., $m = 1$.

The central Bragg peak 44 has a full-width at half maximum of about 1 to 3 nanometers (nm) and a reflectivity that is 2-4 or more times as large as the reflectivity of any side peak 45-50. The Bragg peak wavelength is controlled by the value of the tuning current applied to the tuning section 34 via electrical terminals 52, 53. Changing the value of the tuning current changes effective index of refraction, μ_e , in the portion 40 of waveguide 36 in the tuning section 34. Aging produces physical changes to the tuning section 34 that alter the relationship between the value of the tuning current and μ_e .

The output spectrum of the DBR laser 30 depends both on the gain properties of gain section 32 and on the reflectivity of tuning section 34. Optical modes that are either not strongly amplified in the gain section 32 or not strongly reflected by the tuning section 34 are essentially absent in the laser's output optical signal. The gain section 32 has a medium whose gain is almost spectrally flat on the scale of the Bragg reflection width. The spectral flatness of this gain implies that the laser's Fabry-Perot cavity will have several side-band modes and that as much as about 50% of the total output energy could be in those modes if the tuning section 34 also had a spectrally flat reflectivity. In fact, the reflectivity of the tuning section 34 has a strong spectral dependence due to the sharpness of the reflection peaks 44-50 of Bragg grating 38. The spectral dependence of the reflectivity makes the laser's Fabry-Perot cavity function as if it has a strongly spectrally dependent "effective" gain. For such an effective gain, only modes of the Fabry-Perot cavity with wavelengths near that of the central Bragg peak 44 occur in the laser's optical output. For the DBR laser 30, side modes carry about 10^{-1} to 10^{-2} percent of the output optical energy if a mode of the Fabry-Perot cavity has a wavelength near the Bragg peak wavelength, i.e., optimal operating condition.

Under optimal operating conditions, the Bragg peak wavelength of tunable Bragg grating 38 closely corresponds to the output wavelength of DBR laser 30. This

correspondence is used, by various embodiments, to track age-induced changes to the operating characteristic that relates output wavelength to tuning current.

Referring to Figure 4, reflection spectra A, B, and C of Bragg grating 38 for corresponding initial values I_A , I_B , and I_C of the tuning current are sketched. The initial values of the tuning current satisfy $I_A > I_B > I_C$. The I_A , I_B , and I_C values of the tuning current produce reflection spectra A, B, and C with different values of Bragg peak wavelength, λ_B , because the value of effective index of refraction μ_e depends on the value of the tuning current and the value of Bragg peak wavelength, λ_B , depends on the value of μ_e .

On each spectrum A, B, and C, the reflectivity of light at 1549, 1550, and 1551 nm, i.e., wavelengths of modes of the laser's Fabry-Perot cavity, are indicated by "x", "+", and "o", respectively. For values of the tuning current producing spectra B and C, one optical mode of the laser's Fabry-Perot cavity has a wavelength closest to the Bragg peak wavelength. That mode has a much higher reflectivity than other modes of the laser's Fabry-Perot cavity, which have wavelengths farther away from the Bragg peak wavelength. For the value of the tuning current producing spectra A, no single mode of the laser's Fabry-Perot cavity has a wavelength close to the Bragg peak wavelength. Here, the two modes of the cavity at 1549 and 1550 nm have comparable reflectivities and are approximately equally well reflected by Bragg grating 38, because both modes have wavelengths at about equal distances from the Bragg peak wavelength.

Figure 5 shows initial operating characteristic 54 of the DBR laser 30. The operating characteristic 54 indicates how the laser's output wavelength initially depends on the tuning current. On the operating characteristic 54, points A', B', and C' correspond initially to respective values I_A , I_B , and I_C of the tuning current. Points B' and C' lie at centers of steps 56, 58 of the characteristic 54 and correspond to "pure" operating modes in which side-band emissions are low. Point A' lies on a region between two steps 56 and 60 of the characteristic 54 and corresponds to a mixed mode in which two output wavelengths are present.

Referring to Figure 4 and 5, the spectrally selective reflectivity of Bragg grating 38 effectively modulates the gain of the laser's Fabry-Perot cavity. For values I_B and I_C of the tuning current, a single mode of the laser's Fabry-Perot cavity at about 1550 nm

and 1551 nm respectively, has a wavelength close to the Bragg peak wavelength of spectra B, C. For these values of the tuning current, only the mode at the Bragg peak wavelength is significantly amplified and capable of lasing. Other modes of the laser's Fabry-Perot cavity are attenuated due to the smaller reflectivity of the Bragg grating 38 at the wavelengths of those modes. These other modes are not significantly present in the output of the DBR laser 30. Thus, the spectra B and C produce "spectrally pure" operating modes at centers of steps 56, 58 of the operating characteristic 54 where side-band emissions are very attenuated. For the value I_A of the current, two modes of the laser's Fabry-Perot cavity at 1549 and 1551 nm are about equally reflected by the Bragg grating 38. Thus, both modes are present in the optical output of the DBR laser 30, and this value of the tuning current corresponds to a point between two steps 56, 60 of the operating characteristic 54.

Figures 4 and 5 illustrate that the location of the central reflection peak of tunable Bragg grating 38 with respect to the wavelengths of modes of the laser's Fabry-Perot cavity determines the laser's operation. Operation produces one output wavelength when the wavelength of a single mode of the laser's Fabry-Perot cavity is closest to the Bragg peak wavelength. Operation produces two output wavelengths when two modes of the cavity have wavelengths at roughly equal distances from the Bragg peak wavelength. Since the wavelengths of modes of the laser's Fabry-Perot cavity depend only weakly on the value of the tuning current, measuring shifts to the Bragg peak provides a quantitative measure of age-induced wavelength drift in the DBR laser 30.

2. Compensating for Age-Induced Wavelength Drift

Figure 6 is a flow chart showing a process 70 that compensates for age-induced wavelength drift in a DBR laser, e.g., laser 30 of Figure 2. The process 70 determines an initial functional relation, i.e., $\lambda_i(I)$, between the laser's output wavelength, λ_i , and the value of the tuning current, I (step 72). The relation may provide an operating characteristic such as the characteristic 54 of Figure 5 or may provide a single pair of corresponding values for an output wavelength and a value of the tuning current that produces that wavelength. The determination of the initial functional relationship is based on measurements of the output spectrum of the DBR laser for one or more initial

tuning current values. The process 70 determines a functional relation, $\lambda_{B,i}(I)$, between initial Bragg peak wavelengths, $\lambda_{B,i}$, of the laser's tunable Bragg grating and values of the tuning current, I (step 74). The determination of this initial relation uses spectral measurements on light reflected by the laser's tunable Bragg grating while the laser is not lasing, i.e., gain section 32 is OFF.

Next, process 70 ages the DBR laser either through normal use or through accelerated use (step 76). After aging, the process 70 again determines the functional relation, $\lambda_{B,n}(I)$, between Bragg peak wavelength, $\lambda_{B,n}$, and one or more values of the tuning current, I (step 78). The determination of the post-aging functional relationship includes performing new optical reflectivity measurements on the laser's Bragg grating while the DBR laser is not lasing. Various embodiments assume that the tuning current, I , is either a linear or cubic polynomial in measured Bragg peak wavelength $\lambda_{B,i}$ or $\lambda_{B,n}$ as appropriate.

From the pre-aging and post-aging Bragg spectra, process 70 finds a relation between post-aging values, I_n , and pre-aging values, I_i , of the tuning current that correspond to the same Bragg peak wavelength (step 80). The corresponding values define a functional relationship such as $I_n = F(I_i)$ or $I_i = F^{-1}(I_n)$. To find the corresponding values, the process 70 solves $\lambda_{B,n}(I_n) = \lambda_{B,i}(I_i)$. An exemplary relationship is $I_n - I_i = f(\lambda_{B,n}(I_i) - \lambda_{B,i}(I_i))$, which relates the shift of the post-aging tuning current I_n with respect to the pre-aging current I_i to the age-induced change in Bragg wavelength for the same tuning current I_i .

Figure 7 plots data that illustrate the relationship between age-induced shifts to tuning currents ΔI_{tuning} , i.e., $\Delta I_{\text{tuning}} = I_n - I_i$, and $\delta\lambda_B$ for an exemplary DBR laser. Herein, $\delta\lambda_B$ is the post-aging shift of the Bragg peak wavelength λ_B from the value for no tuning current, i.e., $\delta\lambda_B(I_n) = \lambda_{B,n}(I_n) - \lambda_{B,n}(0)$. Since $\lambda_{B,n}(0) = \lambda_{B,i}(0)$, $\delta\lambda_B$ tracks changes to the Bragg peak wavelength for tuning current, I_n . The data points show that ΔI_{tuning} depends linearly on $\delta\lambda_B$. The linear dependence is approximately described by line 90 whose slope is " Δa ". In terms of this slope, the relation between post-aging and pre-aging currents I_n and I_i is approximately given by $I_n = I_i + \Delta a[\lambda_{B,n}(I_n) - \lambda_{B,n}(0)]$.

The functional relationship between pre-aging and post-aging values of the tuning

current enables compensating for age-induced wavelength drift during operation of the DBR laser. To operate the DBR laser, the process 70 selects an output wavelength (step 82). The process 70 finds the pre-aging tuning current, I_s , that previously generated the selected output wavelength by using the pre-aging relationship between output

5 wavelength and tuning current (step 84). Then, the process 70 applies a new value of tuning current, I_a , to the DBR laser (step 86). The new value I_a corresponds to the pre-aging tuning current, I_s , under the relationship found between pre-aging and post-aging tuning currents, i.e., $I_a = F(I_s)$. Applying the new value, I_a , of the tuning current produces the selected output wavelength.

10 Figures 8A and 8B illustrate results obtained from compensation process 70 of Figure 6 for an exemplary DBR laser. Figure 8A displays measured pre-aging and post-aging functions $\lambda_{B,i}(I)$ and $\lambda_{B,n}(I)$, respectively, which relate Bragg peak wavelength to tuning current for the exemplary DBR laser. Figure 8A also displays compensated function, $\lambda_{B,n}(F(I))$ to show the quality of the function F through the agreement between

15 Bragg peak wavelengths $\lambda_{B,n}(F(I))$ and $\lambda_{B,i}(I)$. Figure 8B displays pre-aging operating characteristic, $\lambda_{o,i}(I)$, and post-aging operating characteristic, $\lambda_{o,n}(I)$, for the same DBR laser. Figure 8B also displays the compensated post-aging operating characteristic, $\lambda_{o,n}(F(I))$, which the process 70 obtained from the function $F(I_i)$ relating pre-aging and post-aging values of tuning currents. Heights and tuning current ranges of the pre-aging and compensated post-aging operating characteristics $\lambda_{o,i}(I)$ and $\lambda_{o,n}(F(I))$, respectively,

20 agree to within measurement uncertainties.

The close agreement between the curves for $\lambda_{o,n}(F(I))$ and $\lambda_{o,i}(I)$ shows that operating the aged DBR laser at compensated values $F(I_i)$ of the pre-aging tuning current, I_i , current eliminates wavelength drift. In particular, if current I_i operated the DBR laser

25 optimally prior to aging, i.e., at a center of a selected step on an operating characteristic, then the current $F(I_i)$, which is provided by process 70, will optimally operate the DBR laser after aging.

3. Measuring Bragg Reflection Spectra

Figure 9 shows an apparatus 100 for measuring Bragg peak wavelengths and

30 tuning currents of DBR laser 30. The apparatus 100 includes an external light source 102

for illuminating Bragg grating 38 through an optical input/output 104 while the DBR laser 30 is supplied a tuning current, e.g., via terminals 52, 53 and is not lasing. The light source 102 produces a spectrum that is broad and featureless over a wavelength band in which the Bragg reflection spectrum of the Bragg grating 38 is located. To inhibit lasing during measurements of the Bragg reflection spectrum, either no current is applied to the gain section 32 of the DBR laser 30 or the current is kept below the current value at which the gain section 32 becomes transparent. Light reflected by the Bragg grating 38 passes back through optical input/output 104 and is reflected by a reflector 106 into a spectrum analyzer 108. The spectrum analyzer 108 provides data on spectral intensities to a processor 110.

The processor 110 performs an action on DBR laser 30 in response to data on the reflection spectra from spectrum analyzer 108 and time-correlated data on tuning currents from ammeter 111. In some embodiments, the action includes applying a tuning current of value $F(I_i)$ to tuning section 34 to compensate for age-induced shifts to a pre-aging tuning current, I_i . In other embodiments, the action includes qualifying or disqualifying DBR laser 30 with respect to subsequent age-induced wavelength shifts.

The processor 110 includes program storage media 112, e.g., a random access memory, hard drive, a magnetic disk, or an optical disk, that stores a control program written in a computer-executable form. The program is configured to perform process 70 based on data received from spectrum analyzer 108 and ammeter 111 while Bragg grating 38 is externally illuminated by light source 102. The program uses the data to determine the function, $F(I_i)$, which defines a post-aging tuning current, I_n , that compensates age-induced effects on pre-aging tuning current, I_i , and thus, to determine the form of the above-described action to be performed on the DBR laser 30.

Figure 10 shows an exemplary spectrum 113 from the spectrum analyzer 108. The spectrum 113 includes a slowly varying background light 114, which may, e.g., be produced by an absorption edge of a digital electro-absorption modulator (not shown) located along the path of reflected light. Electro-absorption modulators tend to cut off short wavelength light. The background light 114 also includes direct light from light source 112. On top of the background light 114, the light reflected by the Bragg grating 38 forms a system of reflection peaks 116 that includes a central Bragg peak 118. Since

the background light 114 is broadband, the processor 110 or analyzer 108 can distinguish the reflection peaks 116 from the background light 114.

Some embodiments use a different geometry in which an external light source illuminates Bragg grating 38. Then, only reflected light is received by the spectrum
5 analyzer 108, because the reflected light does not pass back through light source 102 in those embodiments.

Figure 11 shows a monolithic tunable DBR laser 30' whose age-induced
wavelength drift can be compensated by process 70 of Figure 6. The DBR laser 30' has
collinear gain, tuning, amplification, and digital modulation sections 32', 34', 102', 120'
10 constructed into a single InP semiconductor substrate.

The gain section 32 includes a strongly index-guided waveguide 35' that has two
parallel portions. The waveguide 35' belongs to a P-N junction that is located in a
heterostructure. The P-N junction provides optical amplification when forward biased
and becomes optically opaque when unbiased or reverse-biased, e.g., by shorting
15 electrical terminals 51' and 53'. The strongly index-guided waveguide 35', a cleaved
crystal facet 37', and a reflective tuning section 34' form a laser Fabry-Perot cavity.

The waveguide 35' couples to waveguide 40', which is located in tuning section
34' and does not have a pumpable gain medium. The waveguide 40' is adjacent Bragg
grating 38'. The Bragg grating 38' is tunable through a tuning current applied via to
20 terminals 52' and 53' as previously described.

The waveguide 40' also couples to waveguide 103' of amplification section 102'.
The waveguide 103' is located in another P-N heterostructure that can be pumped by a
current applied to terminal 122' to optically amplify light received from tuning section
34'. When electrically pumped, the P-N junction of the amplification section 102' also
25 produces broadband light through spontaneous emission.

The waveguide 103' prolongs into digital modulation section 120', which is
controlled through biasing terminal 124'. The modulation section 120' amplitude-
modulates continuous wave signals from amplification section 102' to produce digital
optical output signals. The modulation section 120' includes an anti-reflective coating
30 125' that reduces reflections.

An example of the monolithic tunable DBR laser 30' of Figure 11 is described in

U.S. Patent No. 5,253,314; which is incorporated by reference herein in its entirety.

Figure 12 shows a process 130 for measuring Bragg spectra of tunable DBR laser 30' of Figure 11. The process 130 electrically biases gain section 32' so that externally incident light is absorbed (step 132). Absorption occurs when the current flowing
5 through electrical terminal 51' has a value below a threshold for optical transparency. In one embodiment, terminals 51' and 53' are shorted so that the gain section 32' is opaque to light incident from tuning section 34'. The process 130 also applies a voltage to terminal 124 to bias digital modulation section 120' to be transparent or semi-transparent so that light reflected by Bragg grating 38' can escape to be detected by an external
10 spectrum analyzer (step 134). The biasing may however, leave the modulation section 120' slightly absorbant to impede optical resonances caused by multiple reflections between reflective coating 125' and the Bragg grating 38'. The process 130 applies a selected tuning current to the tuning section 34' (step 136). The process 130 applies an electrical current either to amplification section 122' or to gain section 32' so that
15 broadband light is spontaneously emitted to illuminate the Bragg grating 38' while the DBR laser 30' is not lasing (step 138). Then, the amplification section 102' or gain section 32' functions as the light source 102 by producing spontaneous emission light due a forward biasing of a P-N junction. Any current in the gain section 32' is smaller than the threshold for self-sustaining "stimulated" emission that causes lasing.

20 The process 130 measures the spectrum of back reflected light from the Bragg reflector 38' (step 140). From the measured spectrum, the process 130 determines the wavelength of the Bragg reflection peak (step 142). This determination may include subtracting out a broadband background of spontaneous emission light from the tuning section 102'. Then, the process 130 stores the corresponding pairs of values of Bragg
25 peak wavelength and tuning current (step 144). The process 130 determines whether Bragg peak wavelengths corresponding to other values of the tuning current are needed (step 146). If data for other values of the tuning current is needed, the process 130 loops back to repeat the determination for a new value of the tuning current (148). If data corresponding to the needed values of the tuning current has been obtained, the process
30 130 stops (step 150).

4. Prequalifying Lifetimes of DBR Lasers

Referring to Figure 11, individual copies of monolithic DBR laser 30' have operating characteristics that differ due to uncontrollable construction variations in dimensions, positions, and physical characteristics of elements of the lasers. To account for variations to tuning section 34', each DBR laser 30' needs to be initially calibrated to determine the laser's operating characteristic. Thereafter, age-induced wavelength drift can be regularly measured and compensated for as described in process 70 of Figure 6.

Instead of regularly compensating for wavelength drift through process 70, each DBR laser 30' can be initially quality tested to predict a lifetime over which that laser's wavelength-to-tuning-current characteristic is unlikely to vary. At the end of the pre-determined lifetime, the DBR laser 30' can be discarded. The use of quality testing avoids the need to deploy apparatus 100 of Figure 9 to regularly monitor wavelength drift for individual DBR lasers 30'. The lifetime prediction may be implemented as a simple pre-qualification/pre-disqualification criteria performed during production, i.e., pass/fail, or as an individualized prediction of a lifetime for each DBR laser 30'.

Figure 13 is a flow chart showing a process 160 for qualifying or disqualifying a tunable DBR laser, e.g., laser 30' of Figure 11, with respect to stability against future wavelength drift. The process 160 measures the Bragg peak wavelength of the laser's tunable Bragg grating for a plurality of values of the laser's tuning current, e.g., by process 130 of Figure 12 (step 161). After manufacture of the DBR laser, the process 160 operates the laser during a preselected burn-in period (step 162). The length of the burn-in period may vary for different types of tunable DBR lasers. e.g., 0, 10%, or 20% of the expected lifetime for the laser 30'. After the burn-in, the process 160 again measures Bragg peak wavelengths of the laser's tunable Bragg grating for the plurality of values of the laser's tuning current (step 164). From the pre-aging and post-aging measurements, the process 160 evaluates the age-dependency of a preselected property of the function, $I(\lambda_B)$, which relates Bragg peak wavelength, λ_B , to the tuning current I (step 166). In one embodiment, the preselected property is the coefficient A for mono-molecular contributions to $I(\lambda_B)$. The mono-molecular contribution is strongly affected by defect densities in the laser's tuning section, and defect densities are increased by aging. The process 160 determines whether the age-dependency of the preselected

property falls in a predetermined range, which qualifies the laser against wavelength drift during the preselected lifetime (step 168). If the age-dependency is in the predetermined range, the process 160 qualifies the DBR laser under test (step 170). If the age-dependency is outside the qualification range, the process disqualifies the DBR laser under test, and the laser is discarded (step 172).

The tuning current, I , is approximately expressible as a cubic polynomial of the carrier density, n_t , in the laser's tuning section. Thus, the current, I , is given by:

$$I/e \cdot V = a \cdot n_t + b \cdot n_t^2 + c \cdot n_t^3$$

where "a", "b", and "c" are measurable constants. The "a" term is the mono-molecular contribution, which is most sensitive to physical changes induced by aging. To relate the value of the tuning current to Bragg peak wavelength, one writes the change $\delta\lambda_B$ in the Bragg peak wavelength as a linear function of the change, δn_t , in the carrier density.

$$\delta\lambda_B = \frac{\lambda_B}{n_e} \Gamma \frac{dn_i}{dn_t} \delta n_t.$$

Here, n_i , n_e , and Γ are the refractive index, the effective index of refraction, and the confinement factor for waveguide 40'. Combining both equations produces a relation between shifts to the Bragg peak wavelength, $\delta\lambda_B$, caused by nonzero tuning currents, I , and values of the tuning current, I . The relation is given by:

$$I = a' \delta\lambda_B + b' (\delta\lambda_B)^2 + c' (\delta\lambda_B)^3 \text{ with}$$

$$a = a' \frac{\lambda_B}{eV n_e} \Gamma \frac{dn_i}{dn_t}, \quad b = b' \frac{\lambda_B}{eV n_e} \Gamma \frac{dn_i}{dn_t}, \quad \text{and} \quad c = c' \frac{\lambda_B}{eV n_e} \Gamma \frac{dn_i}{dn_t}.$$

Here, $\delta\lambda_B$ is equal to $\lambda_B(I) - \lambda_B(0)$. In this equation, the values of coefficients "a", "b", and "c" are obtained from measured values of the Bragg peak wavelength and tuning current.

Figure 14 shows how coefficient "a" of the mono-molecular contribution to the tuning current changes over several aging cycles for ten exemplary DBR lasers 30'. Each cycle provides for accelerated aging by about 3 to 10% of the expected 25 year operating cycle of the DBR laser and was performed by operating the laser with a continuous tuning current of 150-200 ma and an operating temperature of 100-120°C for about 24 hours. The ten DBR lasers 30' break into two groups 176, 178. In the first group 176, the coefficient "a" remains constant after about one 24-hour aging cycle. In the second group 178, the coefficient "a" continues to change as the number of aging cycles grows.

DBR lasers of the first group 176 qualify as stable against wavelength drift after a 24-hour burn-in whereas DBR lasers of the second group 178 should disqualify, because their "a" coefficients continue to increase even after the burn in. The first and second groups 176, 178 of DBR lasers can be distinguished by at least two properties in process 5 160 of Figure 13. One distinguishing property is the initial value of the coefficient "a". The initial value is less than and greater than about 1.1×10^8 per second for lasers of the first and second groups, respectively. Another distinguishing property is the value of the "a" coefficient after a burn-in period of about 3 to 10% of the expected lifetime of the lasers. For the first and second groups 176, 178, the post burn-in value of the "a" 10 coefficient is less than and greater than about 1.5×10^8 , respectively.

5. Compensating Aging Based on the Tuning Current Shift

Plotted data of Figure 7 illustrates a linear functional relationship between ΔI_{tuning} and $\delta\lambda_{\text{Bragg}}$ for one DBR laser. The proportionality constant "a" relates $\delta\lambda_{\text{Bragg}}$ and 15 ΔI_{tuning} over a range of values and is determinable from the age-induced shift to the tuning current at one laser output wavelength, i.e., one value of $\delta\lambda_{\text{Bragg}}$. Thus, measuring ΔI_{tuning} in one mode enables compensation for age-induced drift in other modes where the linear relationship holds. The linear relationship holds for modes in which heating caused by the tuning current has a negligible effect on the relationship between I_{tuning} and $\delta\lambda_{\text{Bragg}}$.

Figure 15 shows an apparatus 180 that compensates for age-induced wavelength drift in DBR laser 30 shown in Figure 2. The apparatus 180 includes a closed wavelength feedback device 182 that stabilizes a single operating mode against age-induced wavelength drift. The feedback device 182 observes light leaking through back reflector 37 of the laser 30 to generate a signal indicative of changes to the operating 25 wavelength to a controller 184. Based on the signal from the device 182, the controller 184 adjusts the tuning current applied to terminal 52 to compensate for wavelength drift in the DBR laser 30.

The controller 184 also receives a measurement of the applied value of the tuning current from ammeter 186. Based on the measurement of the tuning current, the 30 controller 184 is able to jump to a new operating mode in a manner that compensates for aging effects on the tuning current in the new operating mode.

Figure 16 is a flow chart for a process 190 used by controller 184 of Figure 16 to jump to new operating modes in a manner that compensates for aging. The controller 184 stores a set of initial values for tuning currents and Bragg peak wavelength shifts, $\{I_o(j), \delta\lambda_B(j)\}$. These values describe the operating modes "j" of the DBR laser 30 prior to aging. Aging does not change the associated Bragg peak wavelength shift $\delta\lambda_B(j)$.

Prior to a jump, the controller 184 receives a measured value of a tuning current, $I_p(k)$, in the pre-jump operating mode "k" from ammeter 186 (step 192). The pre-jump tuning current $I_p(k)$ may differ from the initial value of the tuning current, $I_o(k)$, for mode "k" due to aging. The controller 184 receives an external request to jump to a new operating mode "m" (step 194). In response to the request, the controller 184 calculates a compensated value of the tuning current $I_p(m)$ for the new operating mode "m" based, at least in part, on the measured value of the tuning current $I_p(k)$ in the pre-jump operating mode "k" (step 196). The controller 184 applies the calculated value of the tuning current $I_p(m)$ to electrical terminal 52 causing the DBR laser 30 to jump to the new operating mode "m" (step 198). Thus, compensation for age-induced drift in the new mode "m" is based on a measurement of the tuning current in the pre-jump operating mode "k".

To predict the tuning current, $I_p(m)$, for new mode "m", the controller 184 uses the initial $\{\delta\lambda_B(j), I_o(j)\}$ values, the measured $I_p(k)$ for the present operating mode, and the known relation between ΔI_{tuning} and $\delta\lambda_B$. From $\delta\lambda_B(k)$, $I_o(k)$, and $I_p(k)$ for the mode "k", the controller 184 calculates the coefficient, Δa , that defines age-induced changes in the relationship between I_{tuning} and $\delta\lambda_B$, i.e., $\Delta a = [I_p(k) - I_o(k)] / \delta\lambda_B(k)$. Then, the controller 184 uses the same linear relationship to determine $I_p(m)$ for the new mode "m" from the initial values $\{\delta\lambda_B(m), I_o(m)\}$ and the calculated value of Δa , i.e., $I_p(m) = I_o(m) + \Delta a \delta\lambda_B(m)$. Thus, the determination of the age-compensated tuning current, $I_p(m)$, for the new mode only uses initial data $\{I_o(j), \delta\lambda_B(j)\}$, which is stored in the controller 184 at manufacture, and the measured tuning current $I_p(k)$ in the pre-jump operating mode "k".

Various embodiments of optical transmitters use apparatus 180 and process 190 of Figures 16 and 17 to control optical transmissions in multiple channels of a DWDM network in a manner that compensates for age-induced wavelength drift.

Other embodiments of the invention will be apparent to those skilled in the art from consideration of the specification, drawings, and claims.

WHAT IS CLAIMED IS:

1 1. A process, comprising:
2 illuminating a Bragg grating of a distributed Bragg reflector (DBR) laser with
3 light while the DBR laser is both supplied a tuning current and not lasing; and
4 performing an action on the DBR laser responsive to a wavelength of a Bragg
5 peak in a portion of the light reflected by the Bragg grating and a value of the tuning
6 current supplied during the illuminating.

1 2. The process of claim 1, further comprising:
2 biasing a Fabry-Perot cavity of the laser to absorb incident light during the
3 illuminating.

1 3. The process of claim 1, wherein the illuminating includes supplying
2 another current to the DBR laser, the another current causing spontaneous emission of
3 light from the DBR laser without causing lasing.

1 4. The process of claim 1, wherein the action includes changing the value of
2 the tuning current to compensate for age-induced wavelength drift in the DBR laser.
3

1 5. The process of claim 1, wherein the action includes finding a functional
2 relationship that associates new values of the tuning current with old values of the tuning
3 current, the associated new and old values capable of producing the same Bragg peak
4 wavelengths in light reflected by the Bragg grating at earlier and present times,
5 respectively.

1 6. The process of claim 5, further comprising:
2 selecting an output wavelength of the DBR laser previously produced in response
3 to one of the old values of the tuning current; and
4 applying one of the new values of the tuning current to the DBR laser in response
5 to the functional relationship associating the ones of the new and old values.

1 7. The process of claim 1, wherein the performing an action includes
2 determining a quantity predictive of whether an output wavelength of the DBR laser will
3 shift more than a selected amount during a selected lifetime of the DBR laser.

1 8. The process of claim 7, wherein the performing an action includes
2 marking the DBR laser as disqualified with respect to stability against wavelength drift in
3 response to the value of the quantity predicting that the output wavelength will shift more
4 than the selected amount.

1 9. The process of claim 7, wherein the performing an act includes marking
2 the DBR laser as qualified with respect to stability against wavelength drift in response to
3 the value of the quantity predicting that the output wavelength will not shift more than
4 the selected amount.

1 10. The process of claim 7, wherein the quantity is a characteristic of a
2 relationship between age-induced shifts to tuning current values and Bragg peak
3 wavelengths produced in light reflected by the Bragg grating for the tuning current
4 values.

1 11. The process of claim 7, further comprising:
2 determining a relationship between values of a Bragg peak wavelength in light
3 reflected off the Bragg reflector and values of a tuning current applied to the DBR laser;
4 then, burning in the DBR laser for a preselected period; and
5 wherein the act of illuminating is performed after the burning in.

1 12. The process of claim 1, wherein the illuminating includes generating the
2 illuminating light from a semiconductor junction by spontaneous emission.

1 13. The process of claim 1, further comprising:
2 at a time prior to the illuminating, measuring values of Bragg peak wavelengths
3 and values of the tuning current capable of causing the Bragg grating to produce the

4 measured values of Bragg peak wavelengths.

1 14. The process of claim 13, further comprising:
2 determining a portion of an operating characteristic that relates output wavelength
3 of the DBR laser to a value of the tuning current capable of producing the output
4 wavelength at the time prior to the illuminating.

1 15. The process of claim 14, wherein the performing an action further includes
2 comparing first and second values of the tuning current capable of causing the Bragg
3 grating to produce reflected light with peaks of the same wavelength at the time of the
4 illuminating and at an earlier time, respectively.

1 16. A process for operating a wavelength-tunable DBR laser, comprising:
2 operating the DBR laser at a first output wavelength;
3 measuring a value of a tuning current causing the DBR laser to operate at the first
4 output wavelength;
5 calculating a new value of the tuning current capable of operating the DBR laser
6 at a second output wavelength based in part on the measured value of a tuning current.

1 17. The process of claim 16, wherein the calculated new value compensates
2 for age-induced wavelength drift.

1 18. The process of claim 16, wherein the calculating includes calculating a
2 parameter that relates age-induced shifts to tuning currents to Bragg peak wavelengths of
3 a tunable Bragg reflector of the laser.

1 19. The process of claim 16, wherein the first and second output wavelengths
2 correspond to first and second operating modes of the DBR laser.

1 20. The process of claim 16, wherein the calculating includes solving one or
2 more equations relating a pre-aging values of tuning current, an associated Bragg peak

3 wavelength, and the measured value of the tuning current.

1 21. An apparatus, comprising:

2 a DBR laser having an electrical terminal for applying a tuning current;

3 a controller coupled to apply a tuning current to the terminal and capable of

4 applying a new value of the tuning current to cause the DBR laser to jump to a new

5 operating mode, the controller configured to determine the new value based in part on a

6 measured pre-jump value of the tuning current.

1 22. The apparatus of claim 21, further comprising a current measurement

2 device coupled to measure values of the tuning current applied to the DBR laser and to

3 send signals to the controller indicative of the measured values.

1 23. The apparatus of claim 21, wherein the laser controller is further

2 configured to stabilize the DBR laser against age-induced wavelength drift based on

3 optical feed back from the laser.

1 24. The apparatus of claim 22, wherein the controller is configured to

2 compensate for age-induced current drift in the determination of the new value.

1 25. A system, comprising:

2 a DBR laser; and

3 a spectrum analyzer positioned to receive light reflected by a tunable Bragg

4 grating of the DBR laser;

5 a processor coupled to receive data on reflection spectra of the Bragg grating from

6 the spectrum analyzer and data on values of tuning currents associated with the reflection

7 spectra, the processor configured to determine a functional relation between Bragg peak

8 wavelengths and the values of the tuning currents from the data.

1 26. The system of claim 25, wherein the DBR laser includes one of a

2 spontaneous emission source and a quasi-white-light source capable of illuminating the

- 3 Bragg grating with broadband light, the optical amplifier section being external to a
- 4 Fabry-Perot cavity of the DBR laser.


1 27. The system of claim 25, wherein the processor is programmed to mark the
2 DBR laser for discard in response to the functional relation predicting that the relation
3 between the Bragg peak wavelengths and values of the tuning current will change within
4 a predetermined lifetime.

1 28. The system of claim 25, wherein the processor is programmed to change a
2 value of the tuning current corresponding to a selected output wavelength in response to
3 the data indicating a change in the relation between the Bragg peak wavelengths and the
4 values of the tuning currents.

ABSTRACT OF THE DISCLOSURE

A process evaluates an aging property of a distributed Bragg reflector (DBR) laser. The process includes illuminating a Bragg grating of the distributed Bragg reflector (DBR) laser with light while the DBR laser is both supplied a tuning current and
5 not lasing. The process also includes performing an action to the DBR laser responsive to a wavelength of a Bragg peak in a portion of the light reflected by the Bragg grating and a value of the tuning current supplied during the illuminating.

FIG. 1 (prior art)

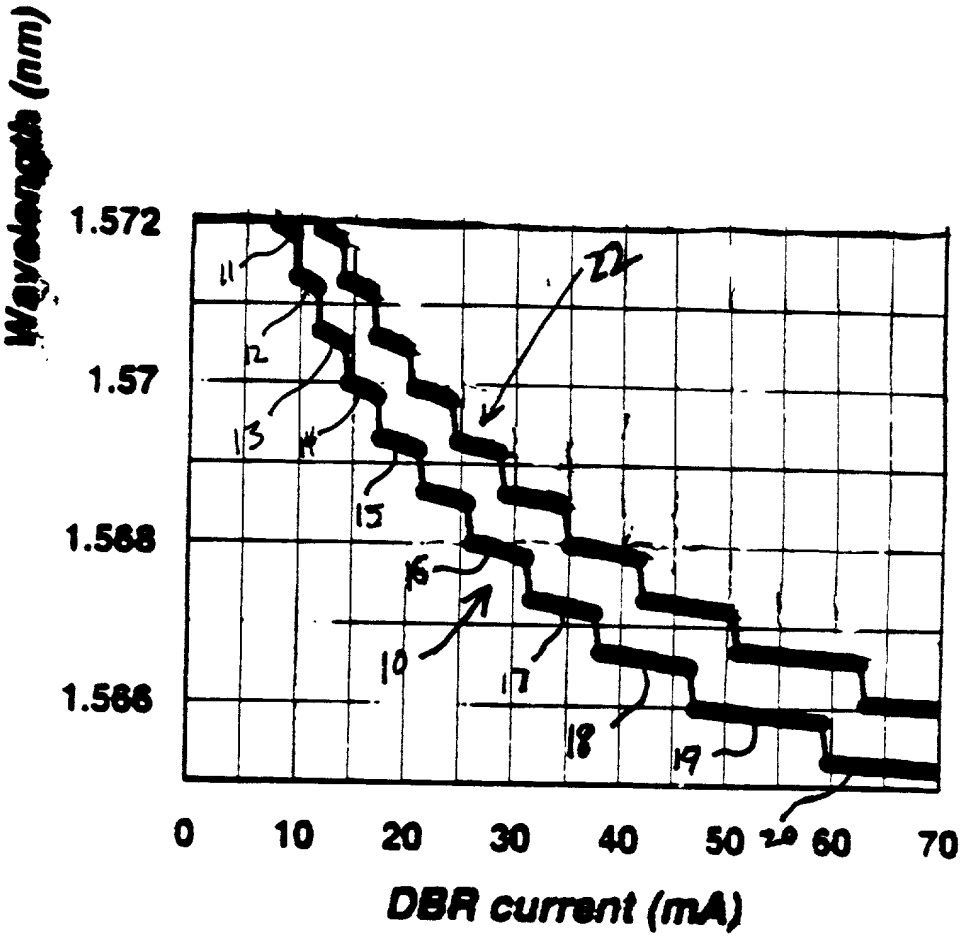


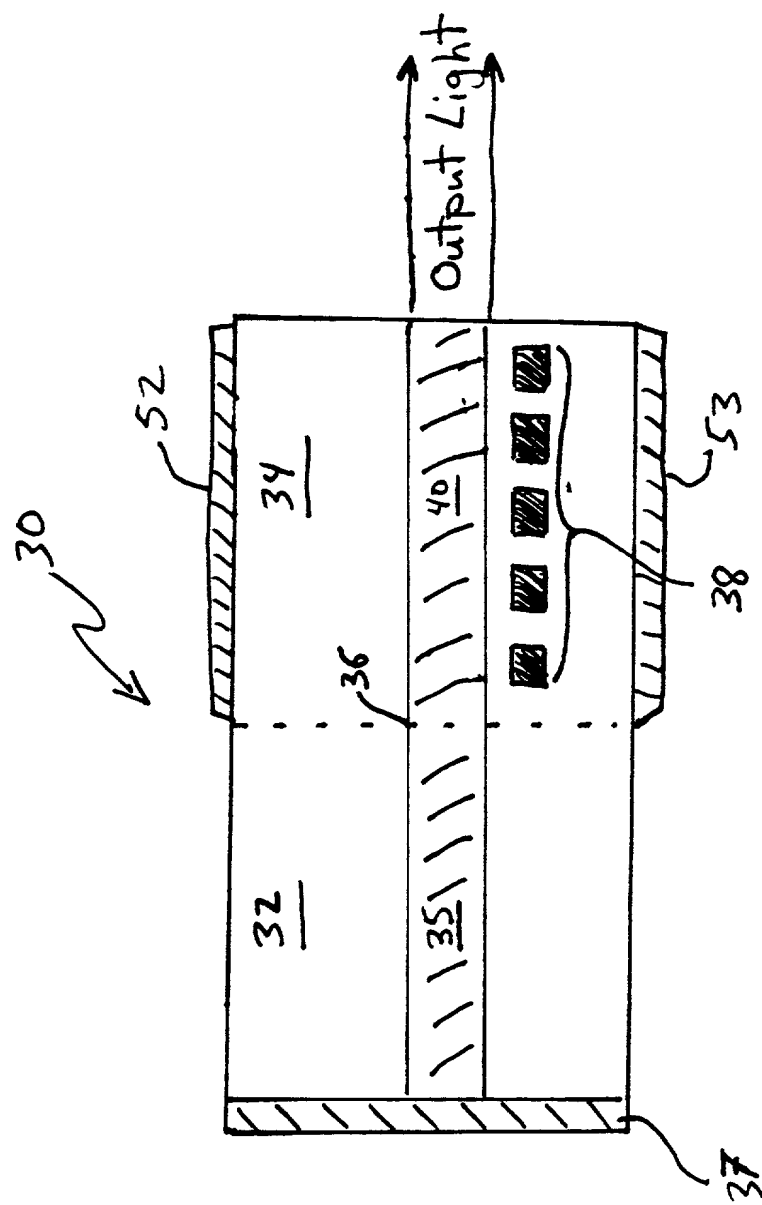


FIG. 2

F/6.3

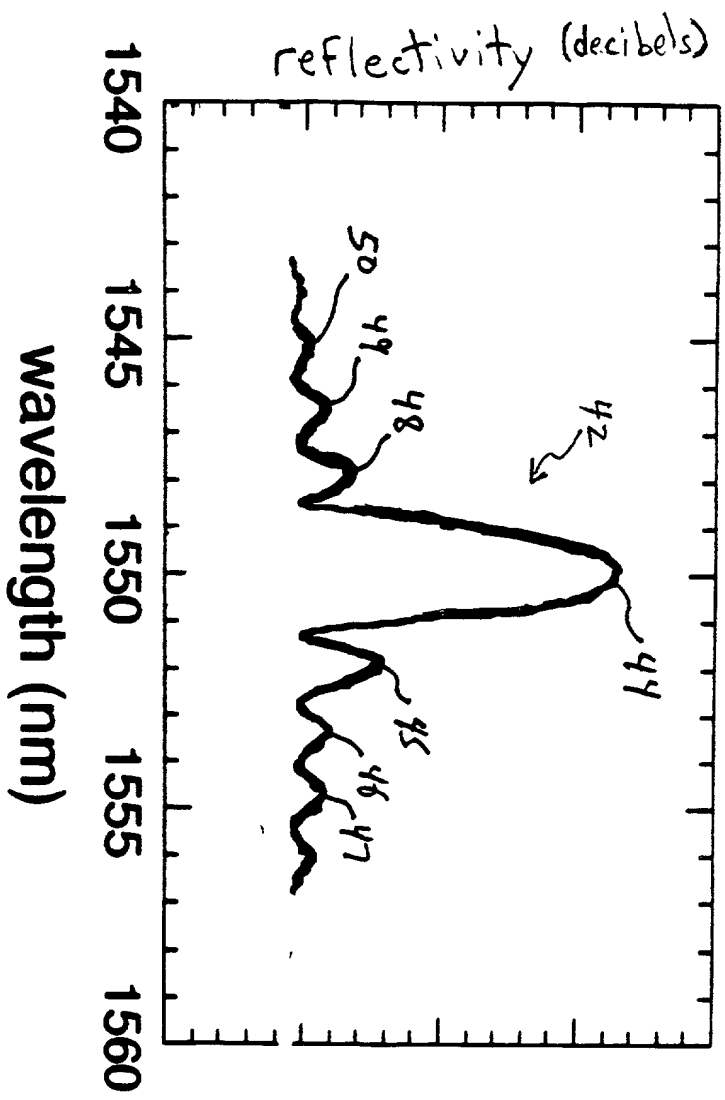

1540 1545 1550 1555 1560

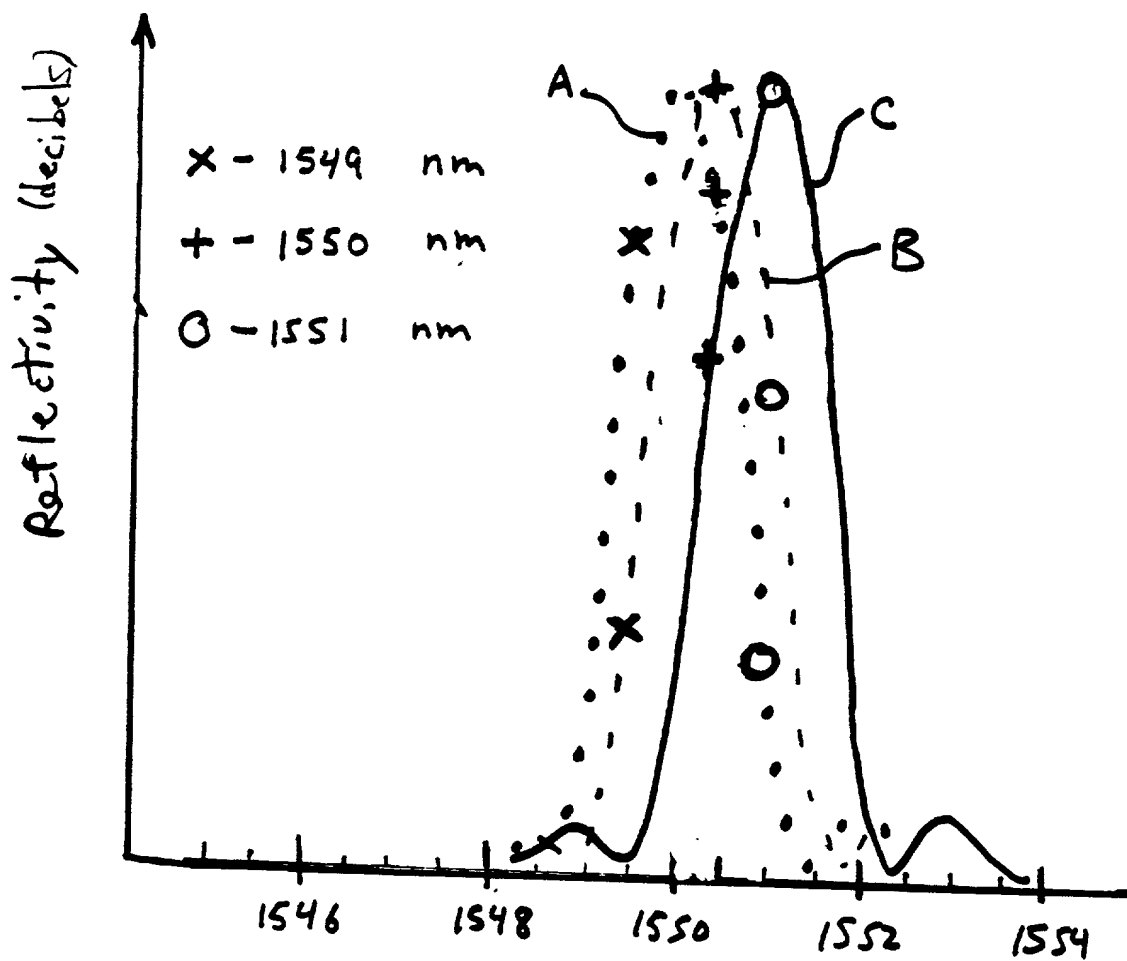


FIG. 4

Year completed	
1990	100%
1991	100%
1992	100%
1993	100%
1994	100%
1995	100%
1996	100%
1997	100%
1998	100%
1999	100%
2000	100%
2001	100%
2002	100%
2003	100%
2004	100%
2005	100%
2006	100%
2007	100%
2008	100%
2009	100%
2010	100%
2011	100%
2012	100%
2013	100%
2014	100%
2015	100%
2016	100%
2017	100%
2018	100%
2019	100%
2020	100%
2021	100%
2022	100%
2023	100%
2024	100%
2025	100%
2026	100%
2027	100%
2028	100%
2029	100%
2030	100%
2031	100%
2032	100%
2033	100%
2034	100%
2035	100%
2036	100%
2037	100%
2038	100%
2039	100%
2040	100%
2041	100%
2042	100%
2043	100%
2044	100%
2045	100%
2046	100%
2047	100%
2048	100%
2049	100%
2050	100%
2051	100%
2052	100%
2053	100%
2054	100%
2055	100%
2056	100%
2057	100%
2058	100%
2059	100%
2060	100%
2061	100%
2062	100%
2063	100%
2064	100%
2065	100%
2066	100%
2067	100%
2068	100%
2069	100%
2070	100%
2071	100%
2072	100%
2073	100%
2074	100%
2075	100%
2076	100%
2077	100%
2078	100%
2079	100%
2080	100%
2081	100%
2082	100%
2083	100%
2084	100%
2085	100%
2086	100%
2087	100%
2088	100%
2089	100%
2090	100%
2091	100%
2092	100%
2093	100%
2094	100%
2095	100%
2096	100%
2097	100%
2098	100%
2099	100%
2100	100%
2101	100%
2102	100%
2103	100%
2104	100%
2105	100%
2106	100%
2107	100%
2108	100%
2109	100%
2110	100%
2111	100%
2112	100%
2113	100%
2114	100%
2115	100%
2116	100%
2117	100%
2118	100%
2119	100%
2120	100%
2121	100%
2122	100%
2123	100%
2124	100%
2125	100%
2126	100%
2127	100%
2128	100%
2129	100%
2130	100%
2131	100%
2132	100%
2133	100%
2134	100%
2135	100%
2136	100%
2137	100%
2138	100%
2139	100%
2140	100%
2141	100%
2142	100%
2143	100%
2144	100%
2145	100%
2	

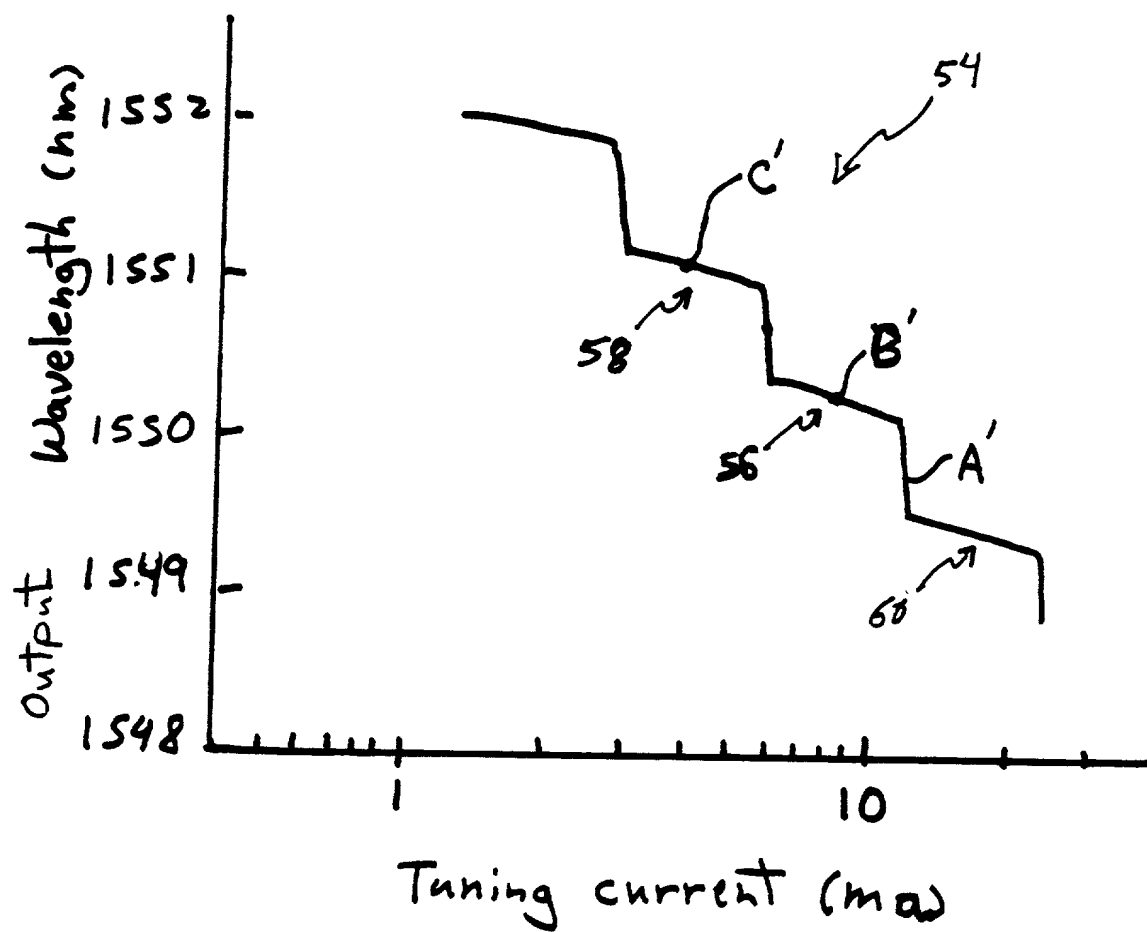


FIG. 5

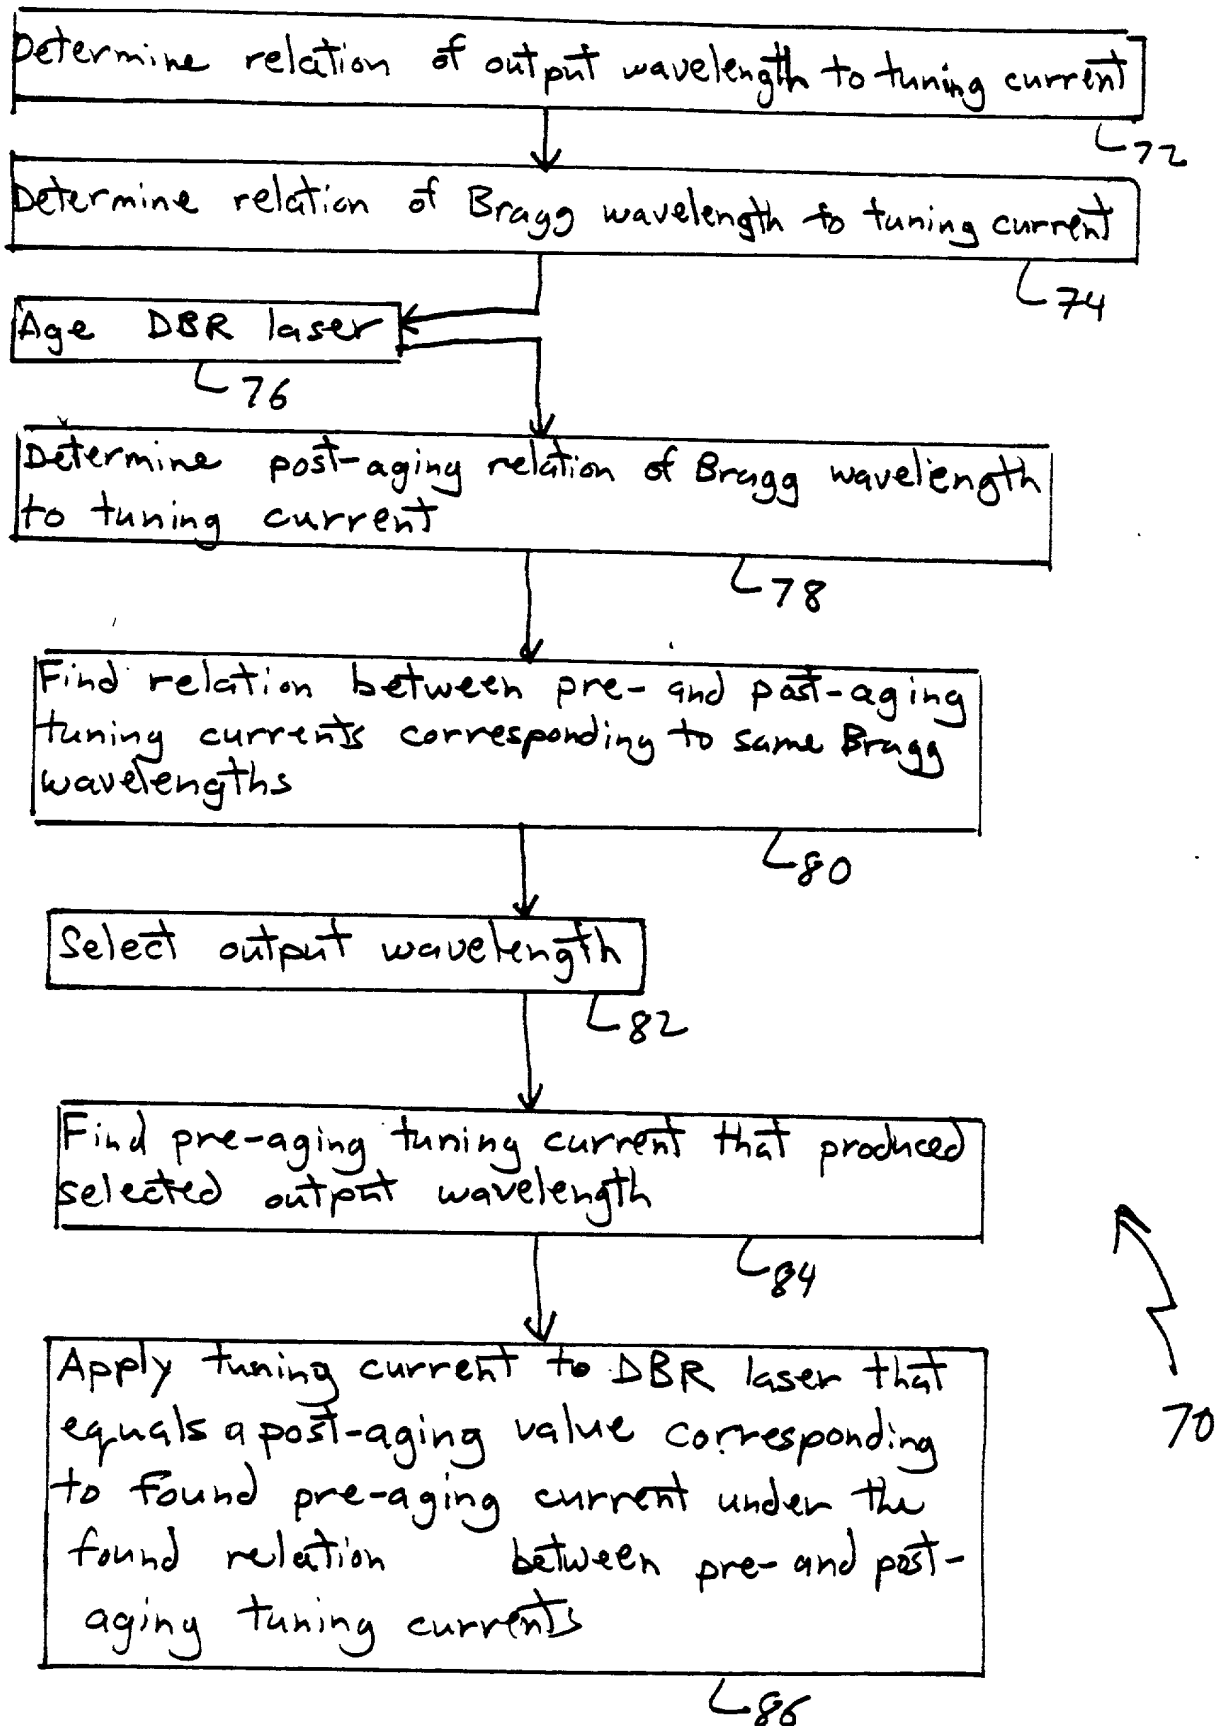
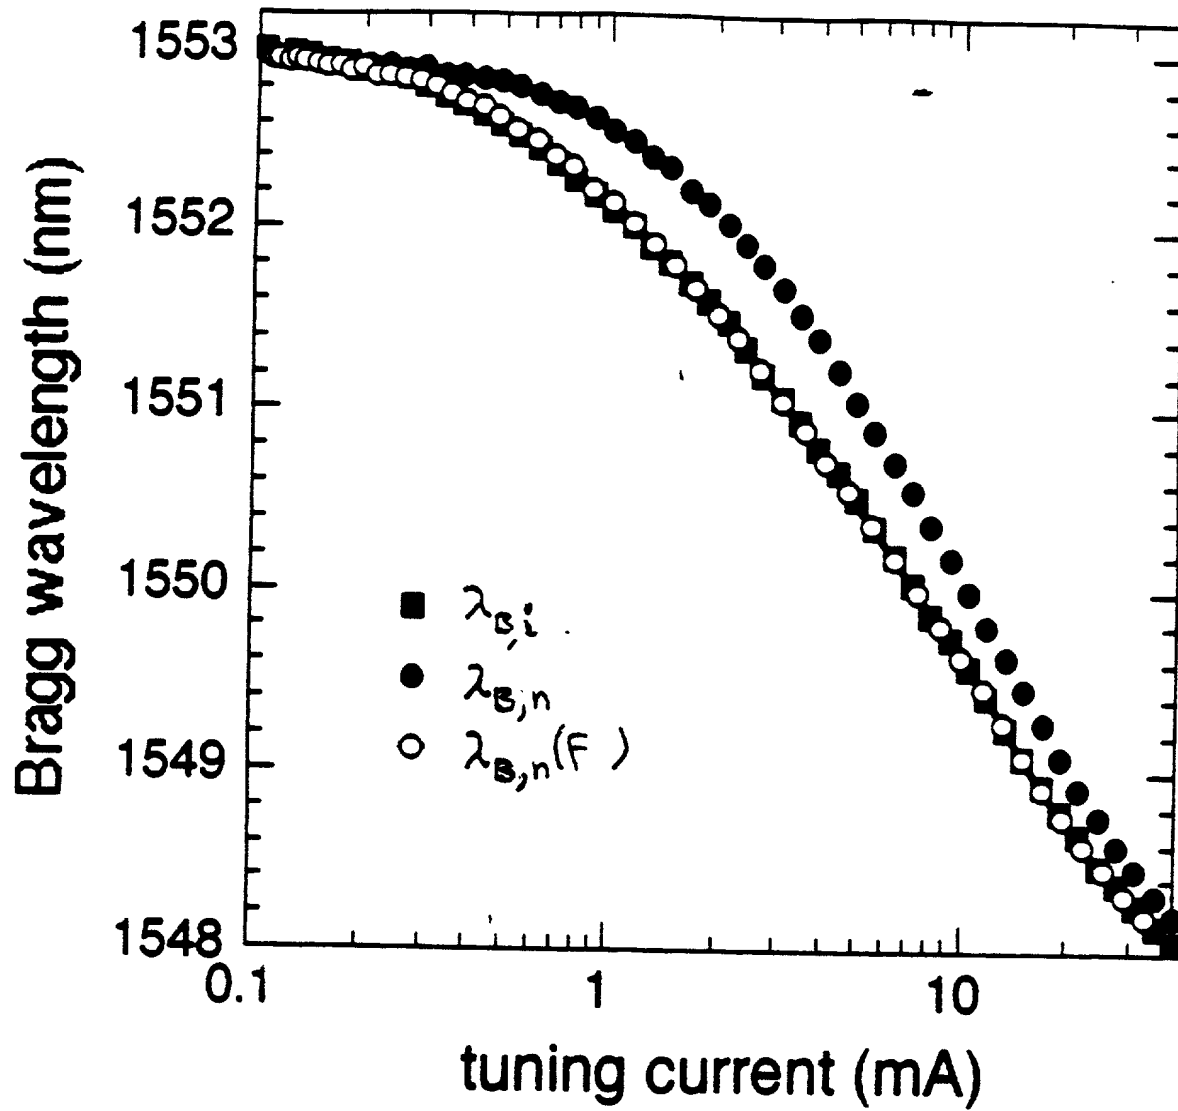


FIG. 6

A scatter plot showing the relationship between the change in tuning current, ΔI_{tuning} (in milli-amperes), and the change in Bragg wavelength, $\Delta \lambda_{\text{Bragg}}$ (in nanometers). The x-axis ranges from 0 to 5 nm, and the y-axis ranges from 0 to 1 mA. Data points are represented by black diamonds, and a solid line represents a linear fit. A label '90' with a curved arrow points to the data points at approximately (3.5, 0.5).

Fig. 7

FIG. 8A





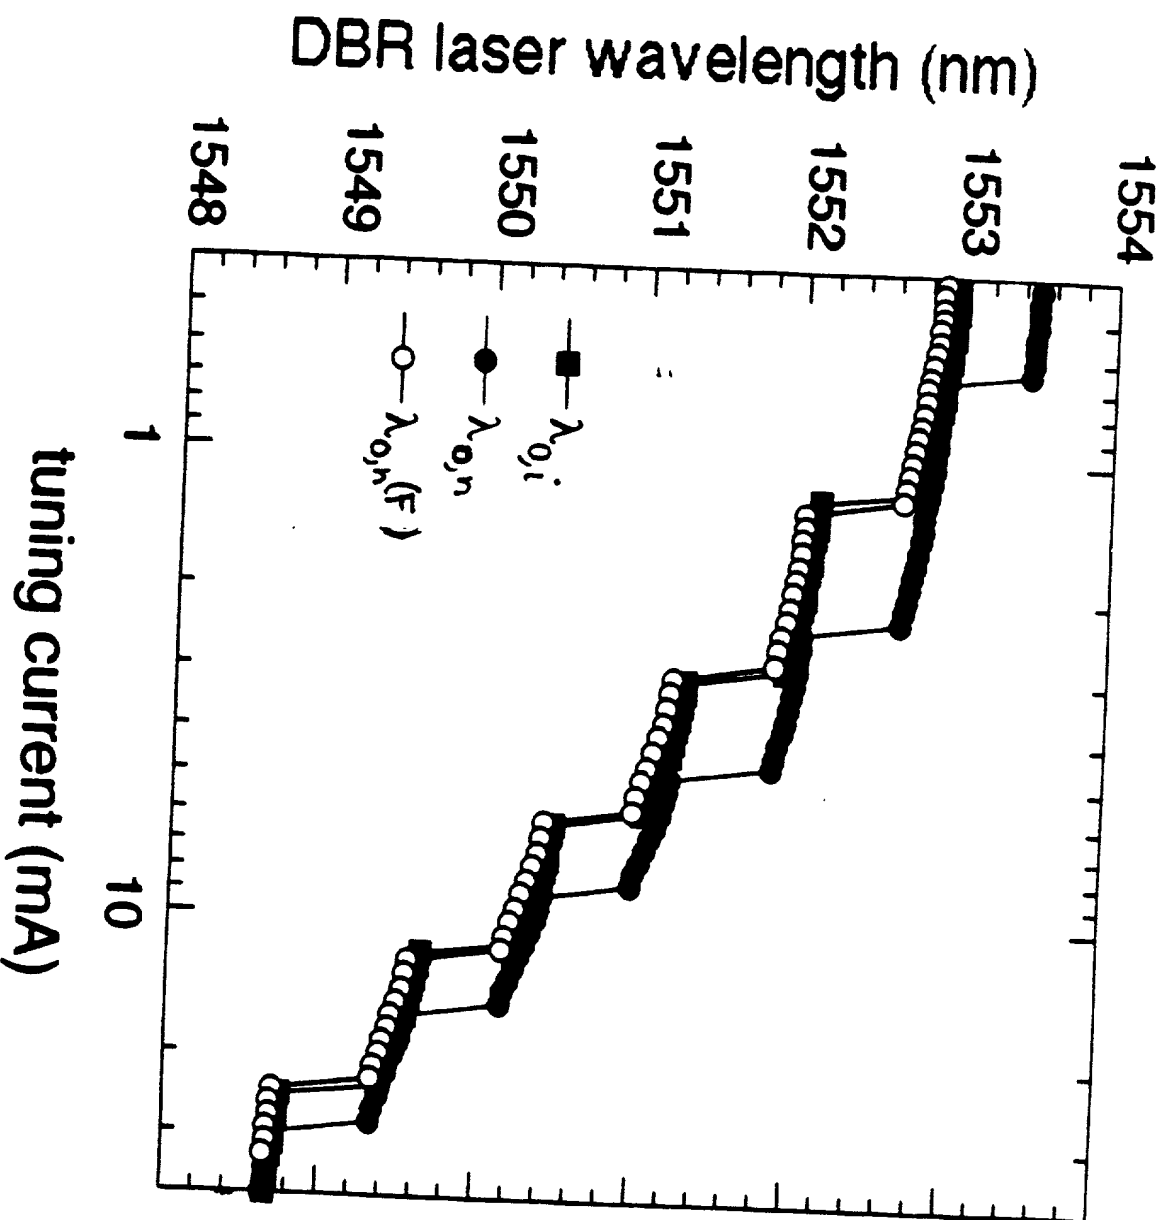


FIG. 8B

416.9

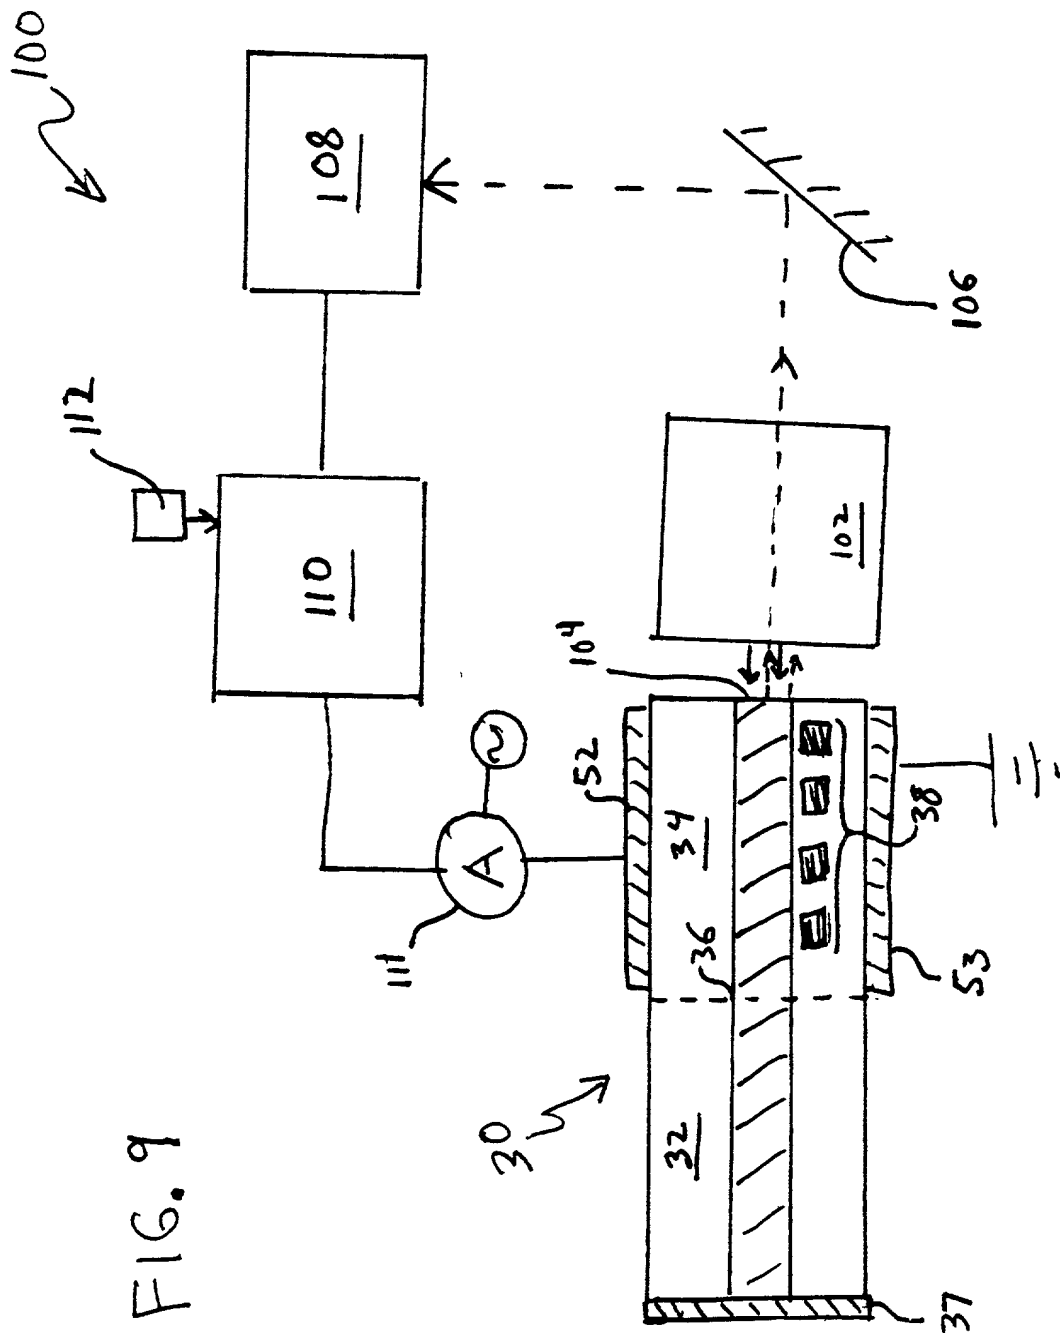



F-16.10

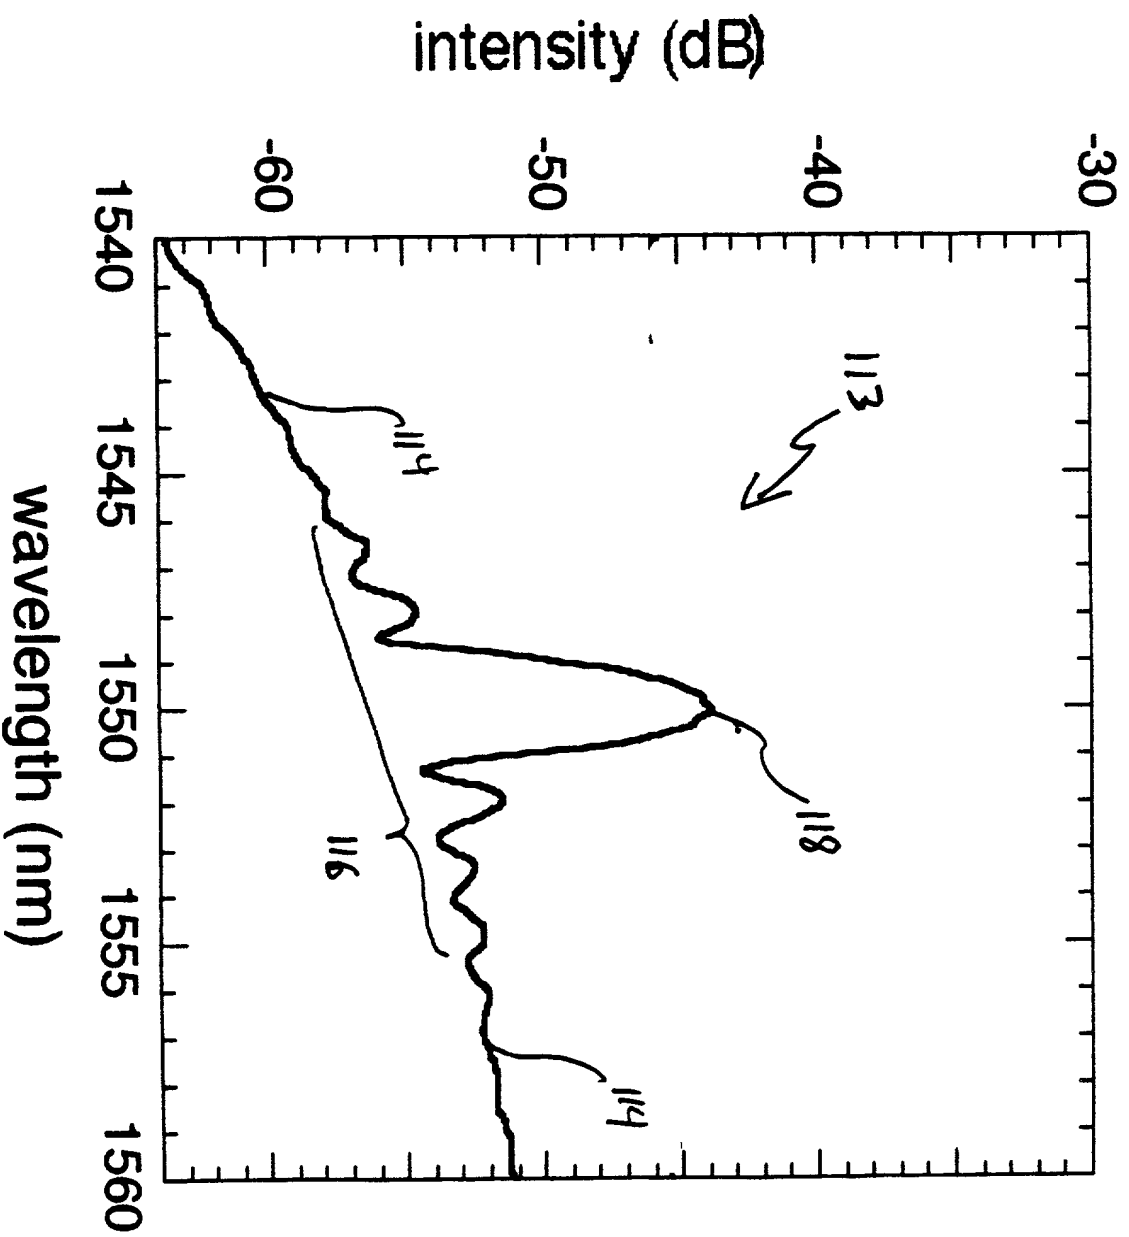

0966075 092200

FIG. 11

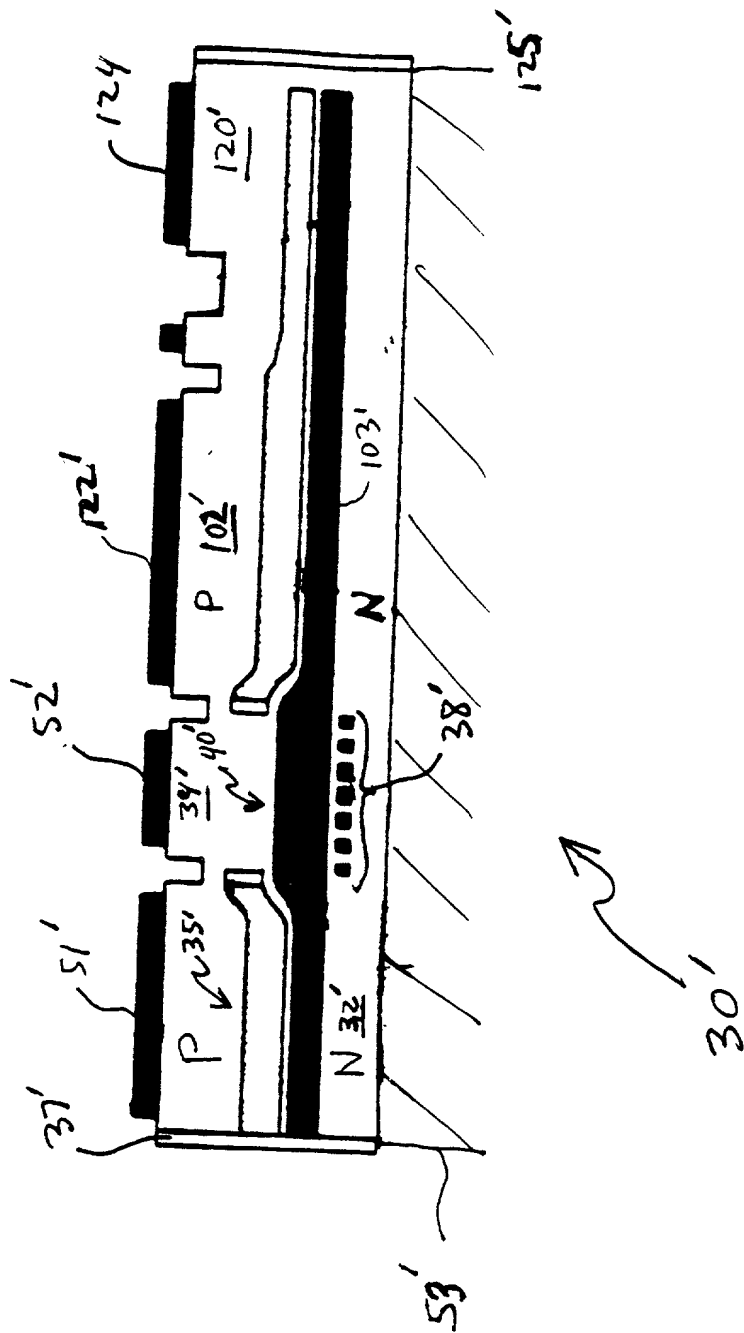

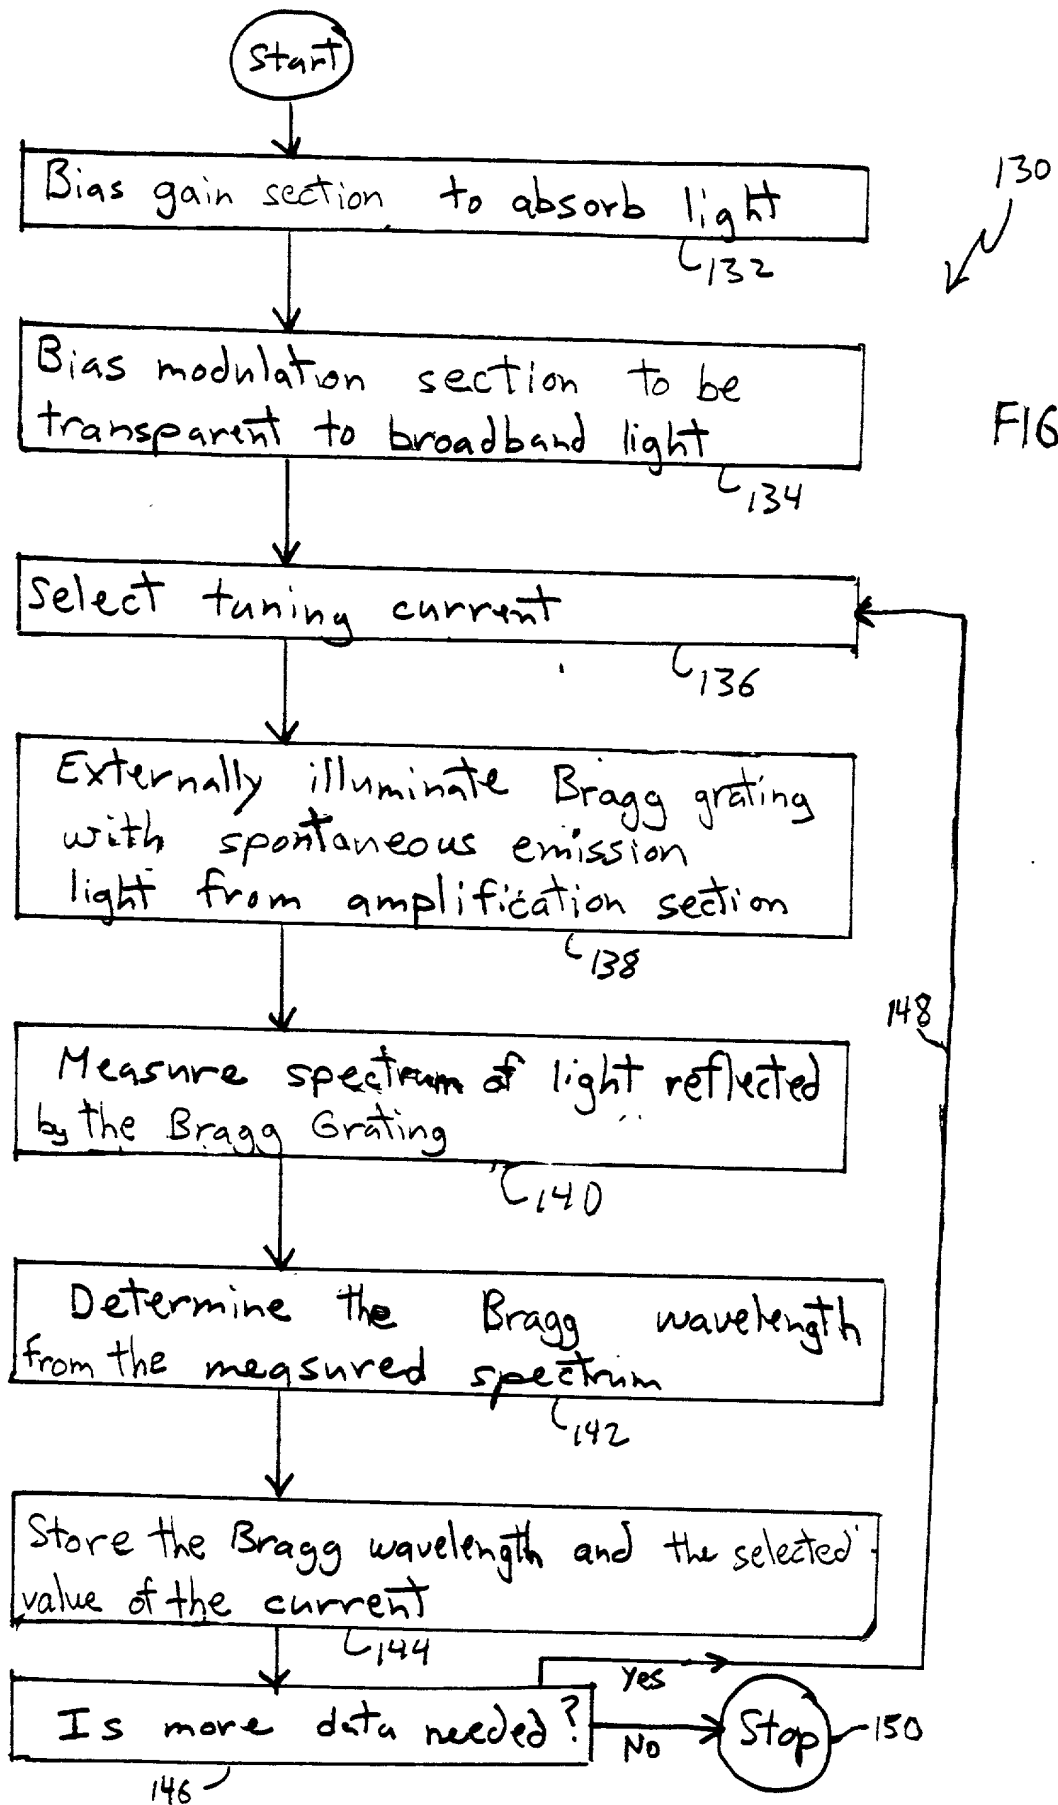

	1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100	2101	2102	2103	2104	2105	2106	2107	2108	2109	2110	2111	2112	2113	2114	2115	2116	2117	2118	2119	2120	2121	2122	2123	2124	2125	2126	2127	2128	2129	2130	2131	2132	2133	2134	2135	2136	2137	2138	2139	2140	2141	2142	2143	2144	2145	2146	2147	2148	2149	2150	2151	2152	2153	2154	2155	2156	2157	2158	2159	2160	2161	2162	2163	2164	2165	2166	2167	2168	2169	2170	2171	2172	2173	2174	2175	2176	2177	2178	2179	2180	2181	2182	2183	2184	2185	2186	2187	2188	2189	2190	2191	2192	2193	2194	2195	2196	2197	2198	2199	2200	2201	2202	2203	2204	2205	2206	2207	2208	2209	2210	2211	2212	2213	2214	2215	2216	2217	2218	2219	2220	2221	2222	2223	2224	2225	2226	2227	2228	2229	2230	2231	2232	2233	2234	2235	2236	2237	2238	2239	2240	2241	2242	2243	2244	2245	2246	2247	2248	2249	2250	2251	2252	2253	2254	2255	2256	2257	2258	2259	2260	2261	2262	2263	2264	2265	2266	2267	2268	2269	2270	2271	2272	2273	2274	2275	2276	2277	2278	2279	2280	2281	2282	2283	2284	2285	2286	2287	2288	2289	2290	2291	2292	2293	2294	2295	2296	2297	2298	2299	2300	2301	2302	2303	2304	2305	2306	2307	2308	2309	2310	2311	2312	2313	2314	2315	2316	2317	2318	2319	2320	2321	2322	2323	2324	2325	2326	2327	2328	2329	2330	2331	2332	2333	2334	2335	2336	2337	2338	2339	2340	2341	2342	2343	2344	2345	2346	2347	2348	2349	2350	2351	2352	2353	2354	2355	2356	2357	2358	2359	2360	2361	2362	2363	2364	2365	2366	2367	2368	2369	2370	2371	2372	2373	2374	2375	2376	2377	2378	2379	2380	2381	2382	2383	2384	2385	2386	2387	2388	2389	2390	2391	2392	2393	2394	2395	2396	2397	2398	2399	2400	2401	2402	2403	2404	2405	2406	2407	2408	2409	2410	2411	2412	2413	2414	2415	2416	2417	2418	2419	2420	2421	2422	2423	2424	2425	2426	2427	2428	2429	2430	2431	2432	2433	2434	2435	2436	2437	2438	2439	2440	2441	2442	2
--	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	---

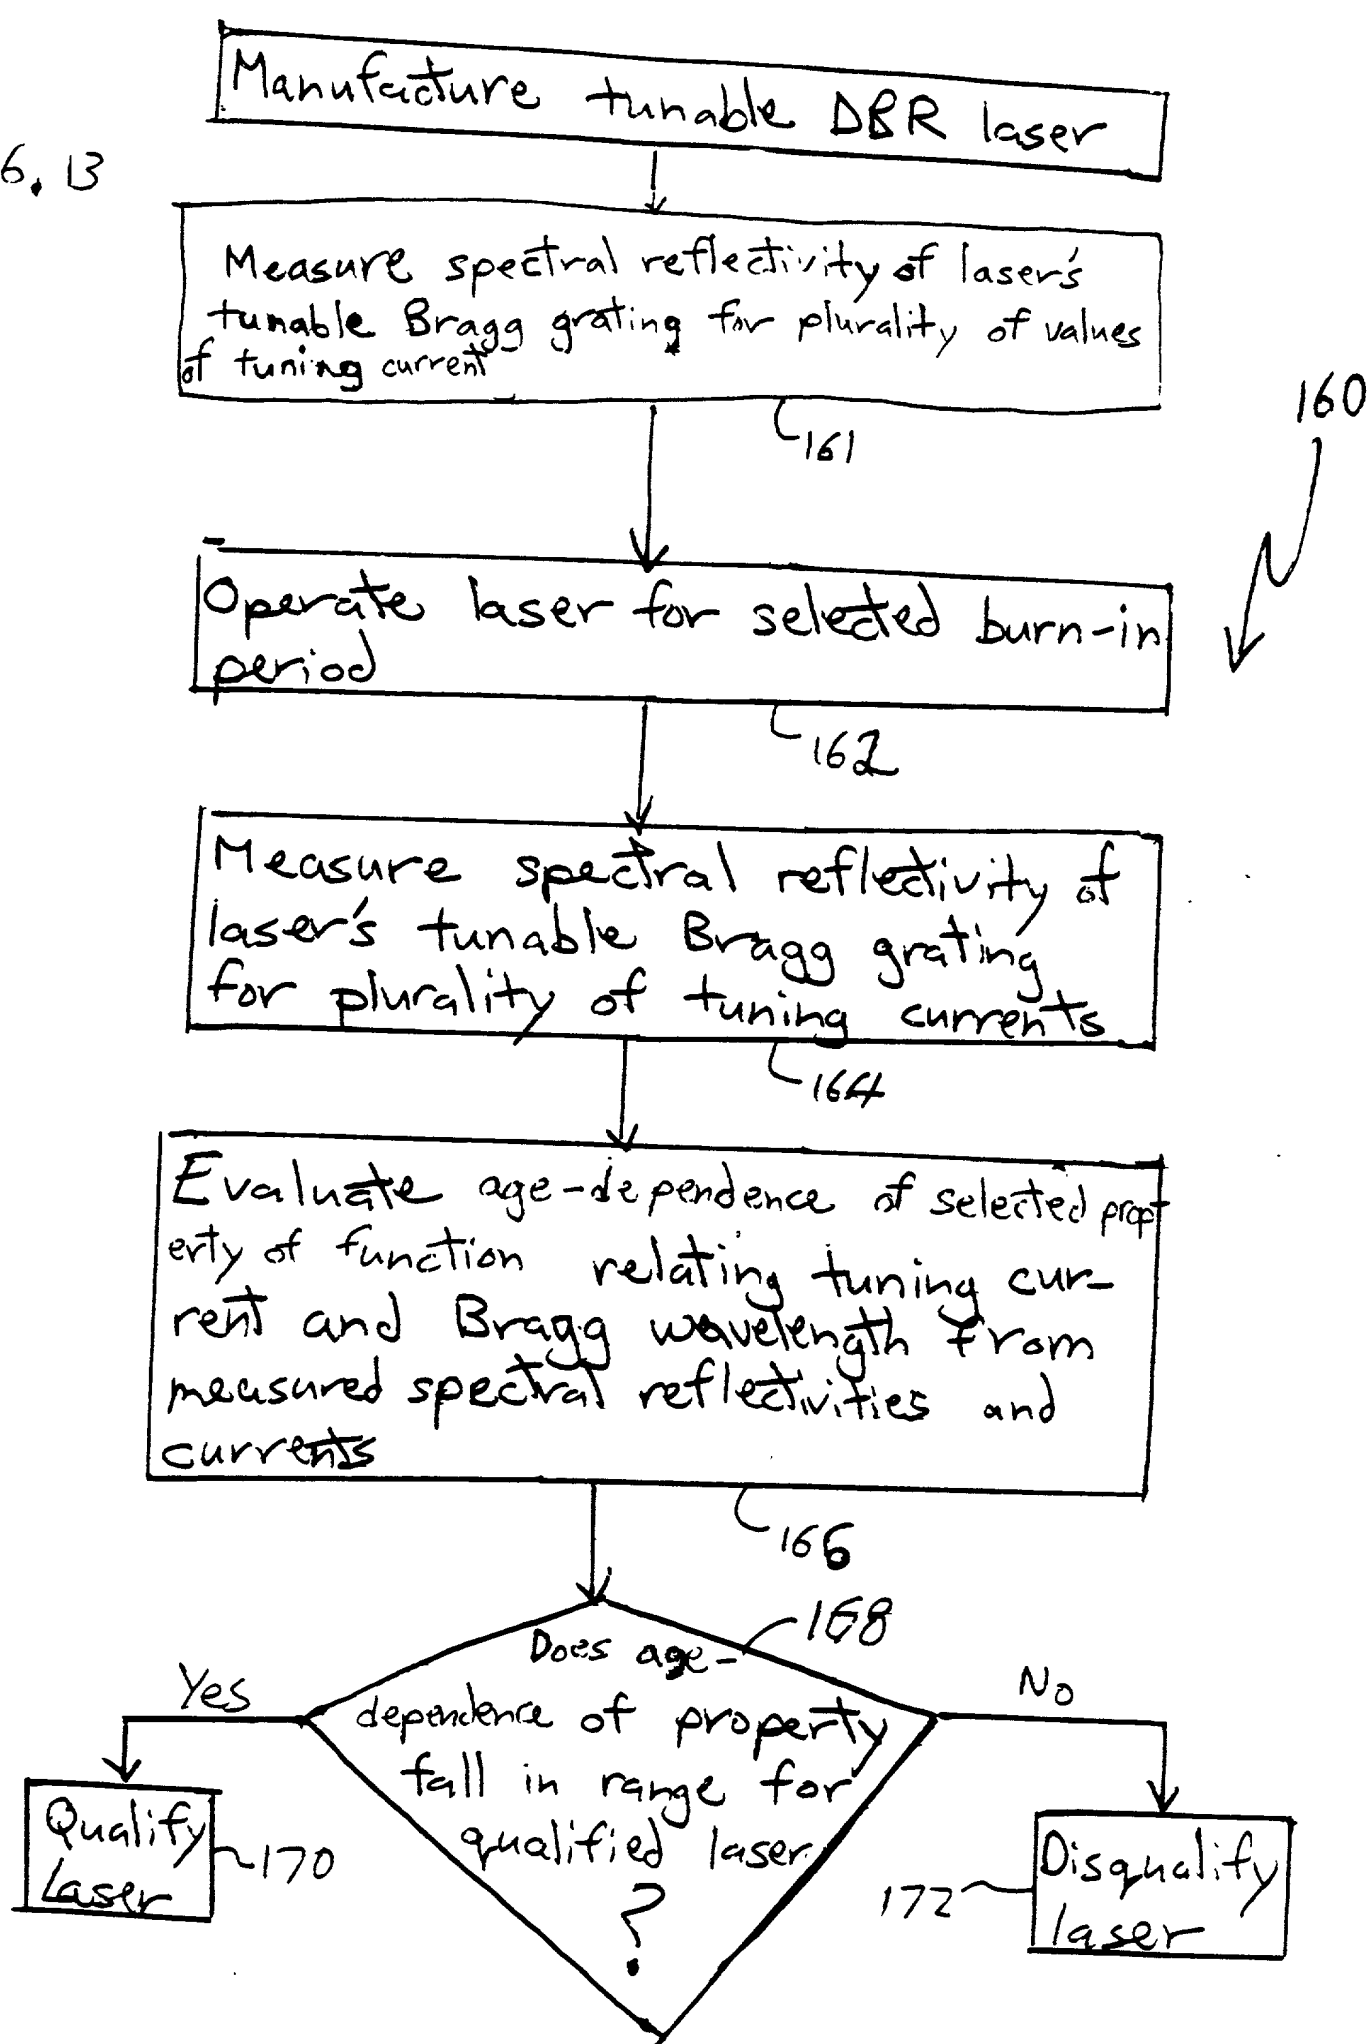


Figure 1 is a line graph showing the variation of the rate of aging A (in units of $10^8/s$) versus the number of aging cycles (0 to 4). The graph displays two groups of curves, labeled 176 and 178, representing different aging temperatures. Each curve shows an initial increase in A with the first cycle, followed by a plateau or slight decrease. Error bars are included for each data point.

Number of aging cycles	A (10 ⁸ /s) for group 176 (approx.)	A (10 ⁸ /s) for group 178 (approx.)
0	0.8 - 1.2	1.2 - 1.5
1	1.1 - 1.3	1.6 - 2.2
2	1.0 - 1.3	1.8 - 2.3
3	1.1 - 1.4	1.9 - 2.5
4	1.1 - 1.4	1.9 - 2.6

FIG. 14

516.15

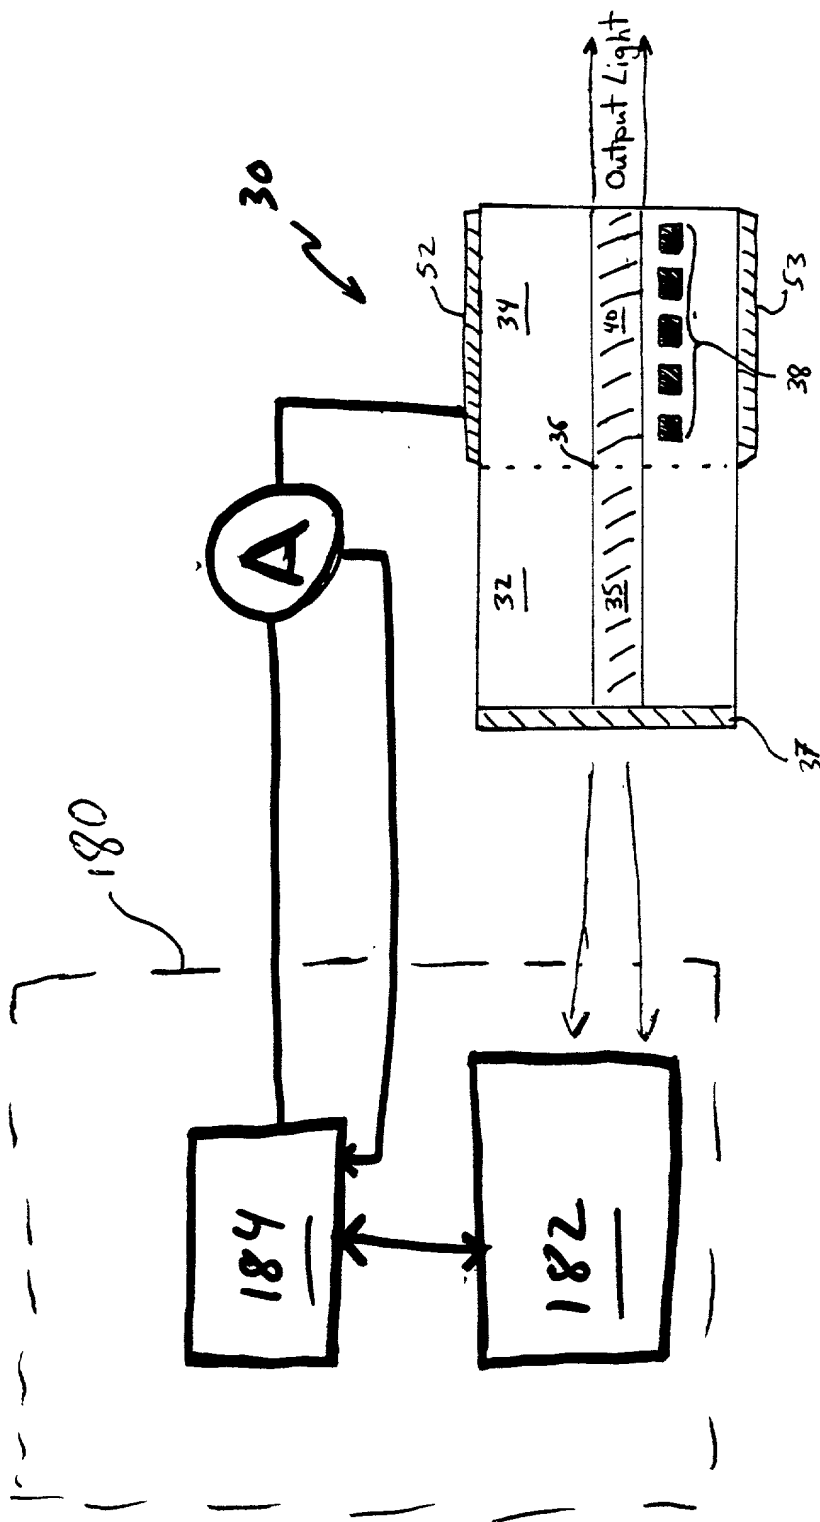


FIG. 2

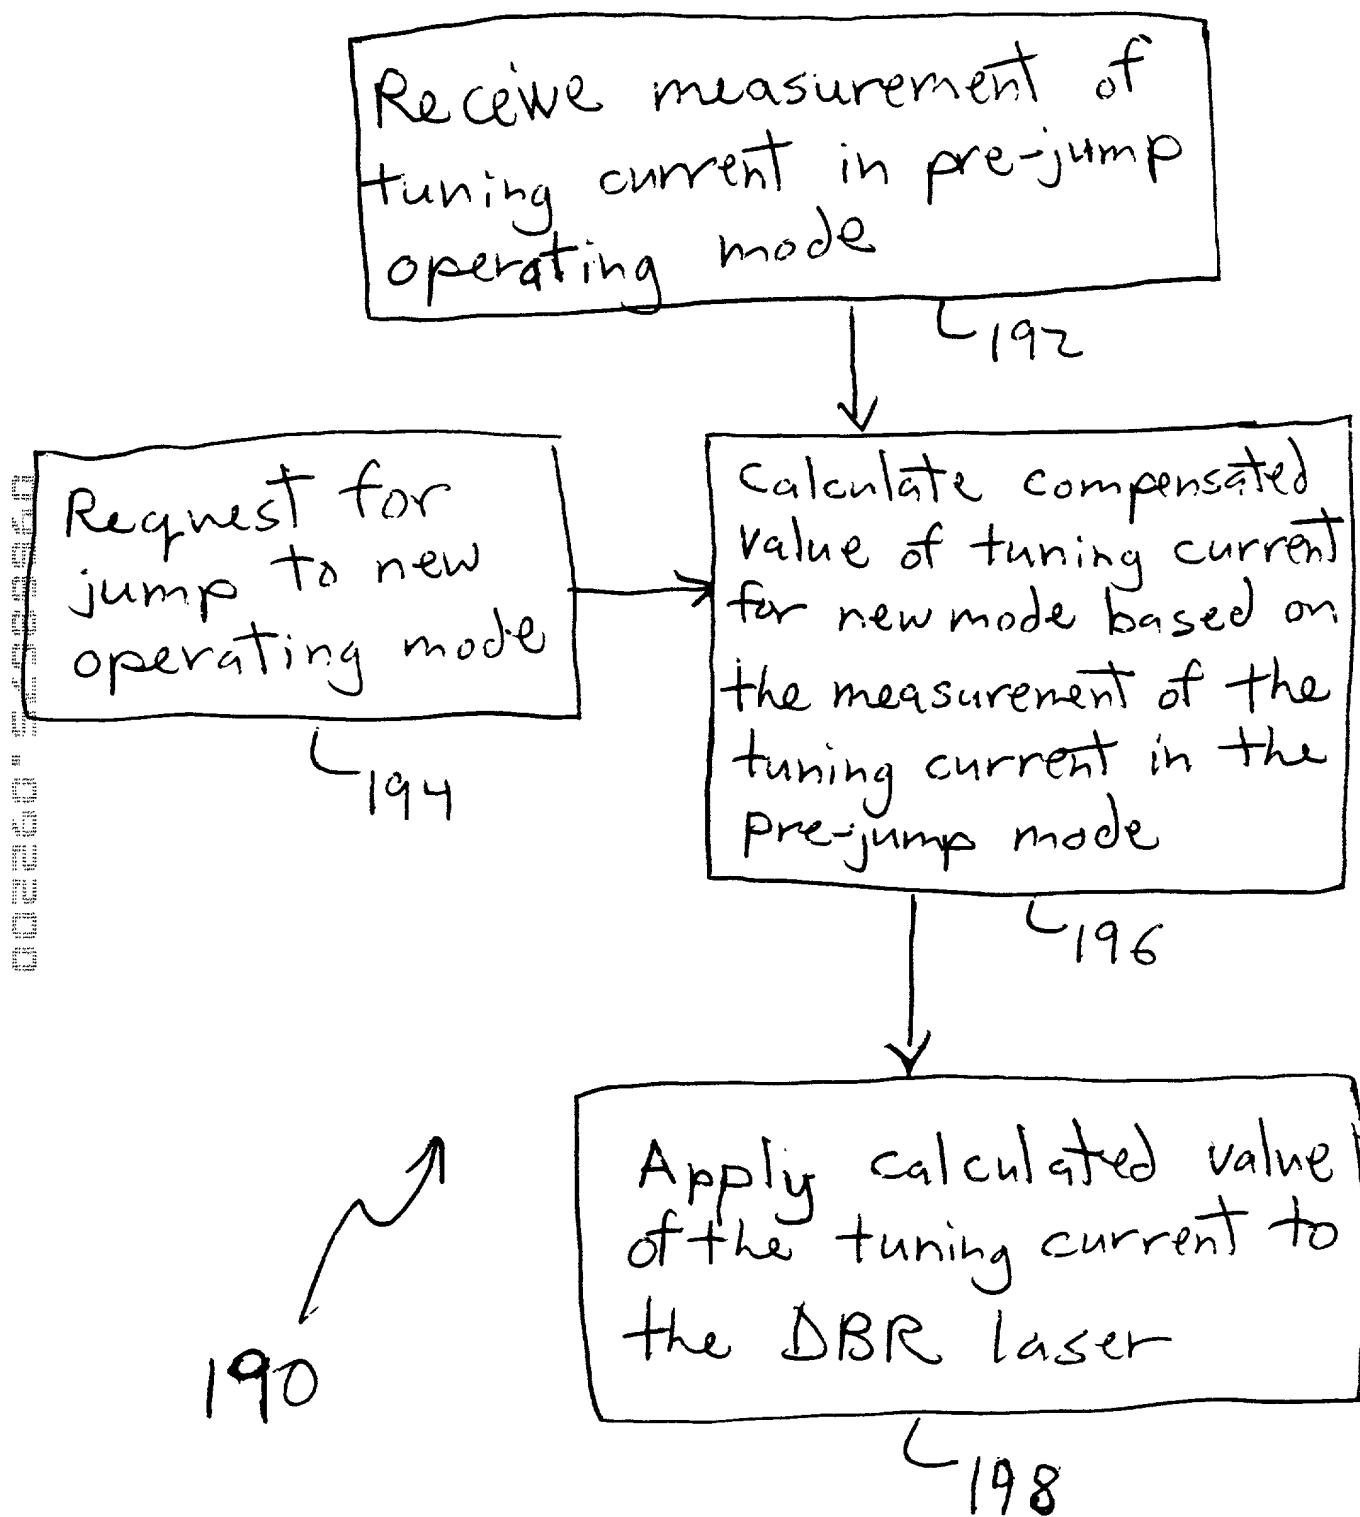


FIG. 16

IN THE UNITED STATES
PATENT AND TRADEMARK OFFICE

Declaration and Power of Attorney

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am an original, first and joint inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled **Aging In Tunable Semiconductor Lasers** the specification of which is attached hereto.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by an amendment, if any, specifically referred to in this oath or declaration.

I acknowledge the duty to disclose all information known to me which is material to patentability as defined in Title 37, Code of Federal Regulations, 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

None

I hereby claim the benefit under Title 35, United States Code, 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, 112, I acknowledge the duty to disclose all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

None

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

I hereby appoint the following attorney(s) with full power of substitution and revocation, to prosecute said application, to make alterations and amendments therein, to receive the patent, and to transact all business in the Patent and Trademark Office connected therewith:

Thomas J. Bean	(Reg. No. 44528)
Lester H. Birnbaum	(Reg. No. 25830)
Richard J. Botos	(Reg. No. 32016)
Jeffery J. Brosemer	(Reg. No. 36096)
Kenneth M. Brown	(Reg. No. 37590)
Donald P. Dinella	(Reg. No. 39961)
Martin I. Finston	(Reg. No. 31613)
William S. Francos	(Reg. No. 38456)
Barry H. Freedman	(Reg. No. 26166)
Julio A. Garceran	(Reg. No. 37138)
Jimmy Goo	(Reg. No. 36528)
Anthony Grillo	(Reg. No. 36535)
Stephen M. Gurey	(Reg. No. 27336)
John M. Harman	(Reg. No. 38173)
Matthew J. Hodulik	(Reg. No. 36164)
Michael B. Johannesen	(Reg. No. 35557)
Mark A. Kurisko	(Reg. No. 38944)
Irena Lager	(Reg. No. 39260)
John B. MacIntyre	(Reg. No. 41170)
Christopher N. Malvone	(Reg. No. 34866)
John F. McCabe	(Reg. No. 42854)
Scott W. McLellan	(Reg. No. 30776)
Martin G. Meder	(Reg. No. 34674)
John C. Moran	(Reg. No. 30782)
Michael A. Morra	(Reg. No. 28975)
Gregory J. Murgia	(Reg. No. 41209)
Claude R. Narcisse	(Reg. No. 38979)
Joseph J. Opalach	(Reg. No. 36229)
Neil R. Ormos	(Reg. No. 35309)
Jack R. Penrod	(Reg. No. 31864)
Gregory C. Ranieri	(Reg. No. 29695)
Scott J. Rittman	(Reg. No. 39010)
Ferdinand M. Romano	(Reg. No. 32752)
Eugene J. Rosenthal	(Reg. No. 36658)
Bruce S. Schneider	(Reg. No. 27949)
Ronald D. Slusky	(Reg. No. 26585)
David L. Smith	(Reg. No. 30592)
Ozer M. N. Teitelbaum	(Reg. No. 36698)
John P. Veschi	(Reg. No. 39058)
David Volejnicek	(Reg. No. 29355)
Charles L. Warren	(Reg. No. 27407)
Eli Weiss	(Reg. No. 17765)

Please address all correspondence to the Docket Administrator (Rm. 3C-512), Lucent Technologies Inc., 600 Mountain Avenue, P. O. Box 636, Murray Hill, New Jersey 07974-0636. Telephone calls should be made to John F McCabe by dialing 908-582-6866.

Full name of 1st joint inventor: David Alan Ackerman

Residence: Hopewell, Mercer County, New Jersey

Citizenship: United States of America

Post Office Address: 7 East Prospect Street
Hopewell, New Jersey, 08525

Inventor's signature S. J. K. K. K. K. K.

Date 1/21/2005

Residence: Murray Hill, Union County, New Jersey

Citizenship: United States of America

Post Office Address: 55 Murray Hill Blvd
Murray Hill, New Jersey, 07974

Inventor's signature _____ Date _____

Residence: Allentown, Lehigh County, Pennsylvania

Citizenship: United States of America

Post Office Address: 365 Lenape Trail
Allentown, Pennsylvania, 18104-8533

Inventor's signature *John Thompson* Date 9/21/00

Date 9/21/00

Residence: New Providence, Union County, New Jersey

Citizenship: United States of America

Post Office Address: 429 Charnwood Road
New Providence, New Jersey, 07974

13-2

Full name of 5th inventor: Liming ZhangInventor's signature Liming Zhang Date 9/22/00

Residence: Marlboro, Monmouth County, New Jersey

Citizenship: China

Post Office Address: 11 Country Club Lane
Marlboro, New Jersey, 07746

D.A. Ackerman 27-15-1-13-2

**IN THE UNITED STATES
PATENT AND TRADEMARK OFFICE**

Declaration and Power of Attorney

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am an original, first and joint inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled **Aging In Tunable Semiconductor Lasers** the specification of which is attached hereto.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by an amendment, if any, specifically referred to in this oath or declaration.

I acknowledge the duty to disclose all information known to me which is material to patentability as defined in Title 37, Code of Federal Regulations, 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

None

I hereby claim the benefit under Title 35, United States Code, 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, 112, I acknowledge the duty to disclose all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

None

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

I hereby appoint the following attorney(s) with full power of substitution and revocation, to prosecute said application, to make alterations and amendments therein, to receive the patent, and to transact all business in the Patent and Trademark Office connected therewith:

002260-5296960

13-2

Thomas J. Bean	(Reg. No. 44528)
Lester H. Birnbaum	(Reg. No. 25830)
Richard J. Botos	(Reg. No. 32016)
Jeffery J. Brosemer	(Reg. No. 36096)
Kenneth M. Brown	(Reg. No. 37590)
Donald P. Dinella	(Reg. No. 39961)
Martin I. Finston	(Reg. No. 31613)
William S. Frances	(Reg. No. 38456)
Barry H. Freedman	(Reg. No. 26166)
Julio A. Garceran	(Reg. No. 37138)
Jimmy Goo	(Reg. No. 36528)
Anthony Grillo	(Reg. No. 36535)
Stephen M. Gurey	(Reg. No. 27336)
John M. Harman	(Reg. No. 38173)
Matthew J. Hodulik	(Reg. No. 36164)
Michael B. Johannesen	(Reg. No. 35557)
Mark A. Kurisko	(Reg. No. 38944)
Irena Lager	(Reg. No. 39260)
John B. MacIntyre	(Reg. No. 41170)
Christopher N. Malvone	(Reg. No. 34866)
John F. McCabe	(Reg. No. 42854)
Scott W. McLellan	(Reg. No. 30776)
Martin G. Meder	(Reg. No. 34674)
John C. Moran	(Reg. No. 30782)
Michael A. Morra	(Reg. No. 28975)
Gregory J. Murgia	(Reg. No. 41209)
Claude R. Narcisse	(Reg. No. 38979)
Joseph J. Opalach	(Reg. No. 36229)
Neil R. Ormos	(Reg. No. 35309)
Jack R. Penrod	(Reg. No. 31864)
Gregory C. Ranieri	(Reg. No. 29695)
Scott J. Rittman	(Reg. No. 39010)
Ferdinand M. Romano	(Reg. No. 32752)
Eugene J. Rosenthal	(Reg. No. 36658)
Bruce S. Schneider	(Reg. No. 27949)
Ronald D. Slusky	(Reg. No. 26585)
David L. Smith	(Reg. No. 30592)
Ozer M. N. Tettelbaum	(Reg. No. 36698)
John P. Veschi	(Reg. No. 39058)
David Volejnick	(Reg. No. 29355)
Charles L. Warren	(Reg. No. 27407)
Eli Weiss	(Reg. No. 17765)

Please address all correspondence to the Docket Administrator (Rm. 3C-512), Lucent Technologies Inc., 600 Mountain Avenue, P. O. Box 636, Murray Hill, New Jersey 07974-0636. Telephone calls should be made to John F McCabe by dialing 908-582-6866.

002250 52309360

3

D.A. Ackerman 27-15-1-

13-2

Full name of 1st joint inventor: David Alan Ackerman

Inventor's signature _____ Date _____

Residence: Hopewell, Mercer County, New Jersey

Citizenship: United States of America

Post Office Address: 7 East Prospect Street
Hopewell, New Jersey, 08525Full name of 2nd inventor: Sung-Nee George Chiu

Inventor's signature _____ Date _____

Residence: Murray Hill, Union County, New Jersey

Citizenship: United States of America

Post Office Address: 55 Murray Hill Blvd
Murray Hill, New Jersey, 07974Full name of 3rd inventor: Eric J DeanInventor's signature Eric J Dean Date 9/11/00

Residence: Allentown, Lehigh County, Pennsylvania

Citizenship: United States of America

Post Office Address: 366 Lenape Trail
Allentown, Pennsylvania, 18104-8533Full name of 4th inventor: John Evan Johnson

Inventor's signature _____ Date _____

Residence: New Providence, Union County, New Jersey

Citizenship: United States of America

Post Office Address: 429 Charnwood Road
New Providence, New Jersey, 07974

002260 58339500

